



Al Alwan Villa

GROUND FLOOR

Table of Contents

Cover	1
Table of Contents	2
Images	4

Product data sheets

NEKO - LED-Downlight (1x TAKEO T75 13W-3000K WW 50°)	16
NEKO - LED-Downlight (1x TAKEO TS150 28W-3000K/70°Ra90)	17
NEKO - LED-Lamps (1x LED CLLE 8W-3000K/120°)	18
NEKO - LED-Lamps (1x SL2835A/IP20 6W 500mm 3000K)	19
NEKO - LED-Lamps (1x SL2835A/IP65 6W 500mm 3000K)	20
NEKO - LED-Magnet Track Light (1x ML26-R2 8W 30°3000K)	21
NEKO - LED-Multiple DownLight (1x TSA1D 15W BB 3000K 60°, 1x TSA1D 15W BB 3000K 60°)	22
NEKO - LED-SpotLight (1x CLUB TSA3 M3 13W 35°3000K BBM)	23
NEKO - LED-SpotLight (1x CLUB TSA3 M4 15W 35°3000K BBM)	24
NEKO - LED-SpotLight (1x MINUX 44 WC 11W 40°3000K)	25
NEKO - LED-SpotLight (1x ML26-MLA2-13W-3000K/35°)	26

Jellyfish Al Alwan Villa - Building 1 - GROUND FLOOR



Room 1

Summary / Light scene 1	27
Calculation objects / Light scene 1	30
KITCHEN / Light scene 1 / Perpendicular illuminance	33
OPEN KITCHEN / Light scene 1 / Perpendicular illuminance	34
FAMILY LIVING / Light scene 1 / Perpendicular illuminance	35
DINING AREA / Light scene 1 / Perpendicular illuminance	36
TV ROOM / Light scene 1 / Perpendicular illuminance	37
LAUNDRY / Light scene 1 / Perpendicular illuminance	38
HOUSE KEEPER / Light scene 1 / Perpendicular illuminance	39
ENTRANCE HALL / Light scene 1 / Perpendicular illuminance	40
HALLWAY / Light scene 1 / Perpendicular illuminance	41
MASTER'S WARDROBE / Light scene 1 / Perpendicular illuminance	42
MASTER'S ROOM CORRIDOR / Light scene 1 / Perpendicular illuminance	43
PRAYER ROOM / Light scene 1 / Perpendicular illuminance	44
TOILET 01 / Light scene 1 / Perpendicular illuminance	45
WASH / Light scene 1 / Perpendicular illuminance	46
MASTER'S ROOM WASH / Light scene 1 / Perpendicular illuminance	47
Elevator lobby / Light scene 1 / Perpendicular illuminance	48
Study room / Light scene 1 / Perpendicular illuminance	49
MASTER'S SUITE / Light scene 1 / Perpendicular illuminance	50
MULTIPURPOSE ROOM / Light scene 1 / Perpendicular illuminance	51
SUNROOM / Light scene 1 / Perpendicular illuminance	52
MASTER'S BATHROOM 1 / Light scene 1 / Perpendicular illuminance	53



Table of Contents

PANTRY / Light scene 1 / Perpendicular illuminance 54


Images

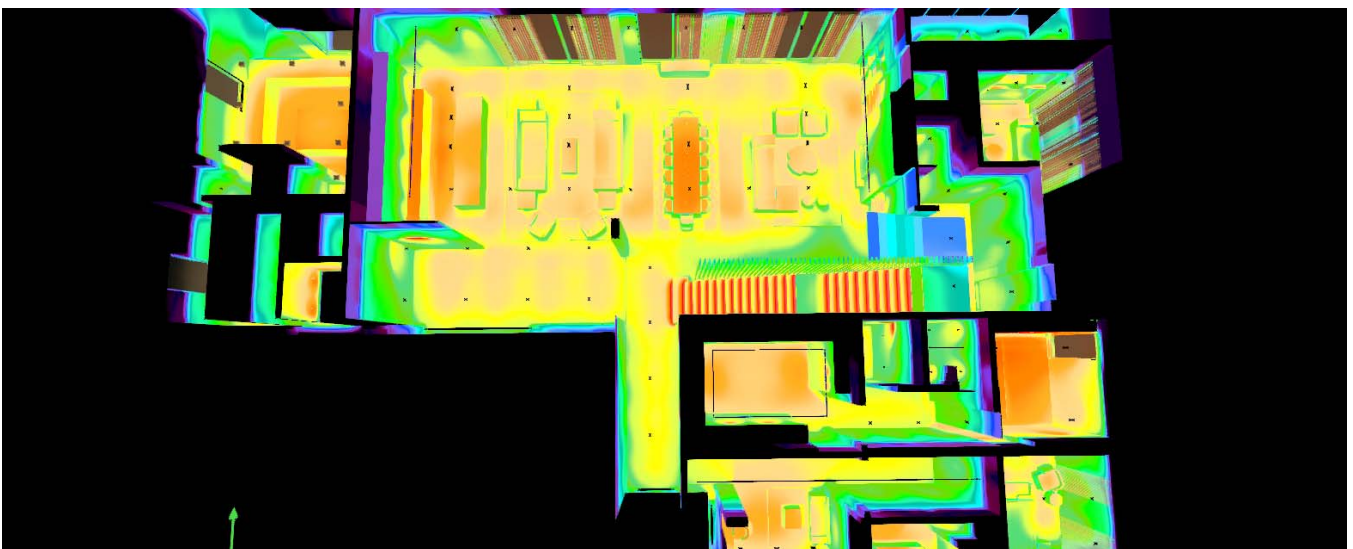



Images

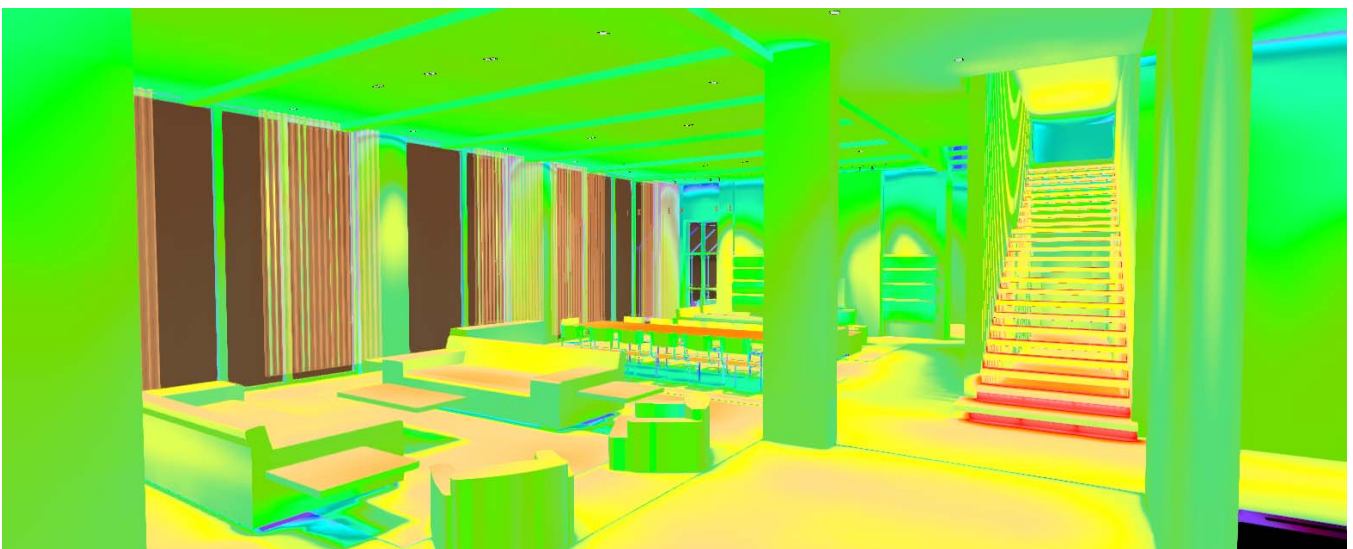



Images

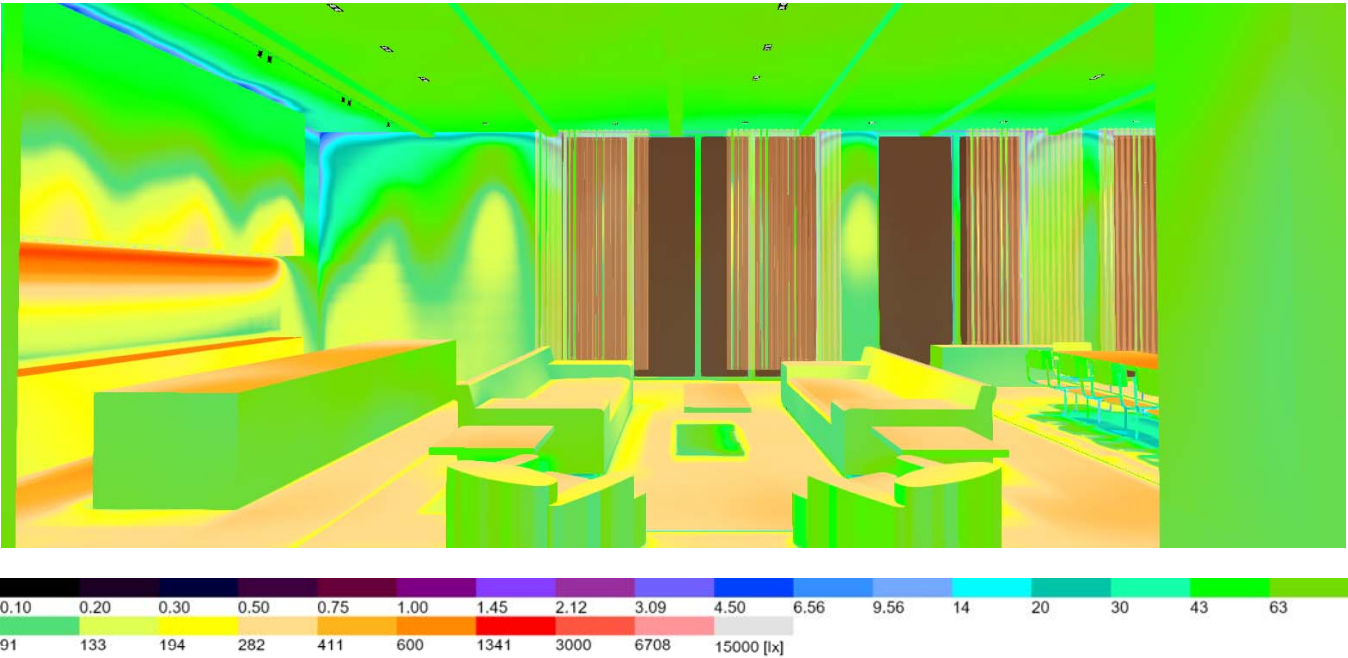



Images

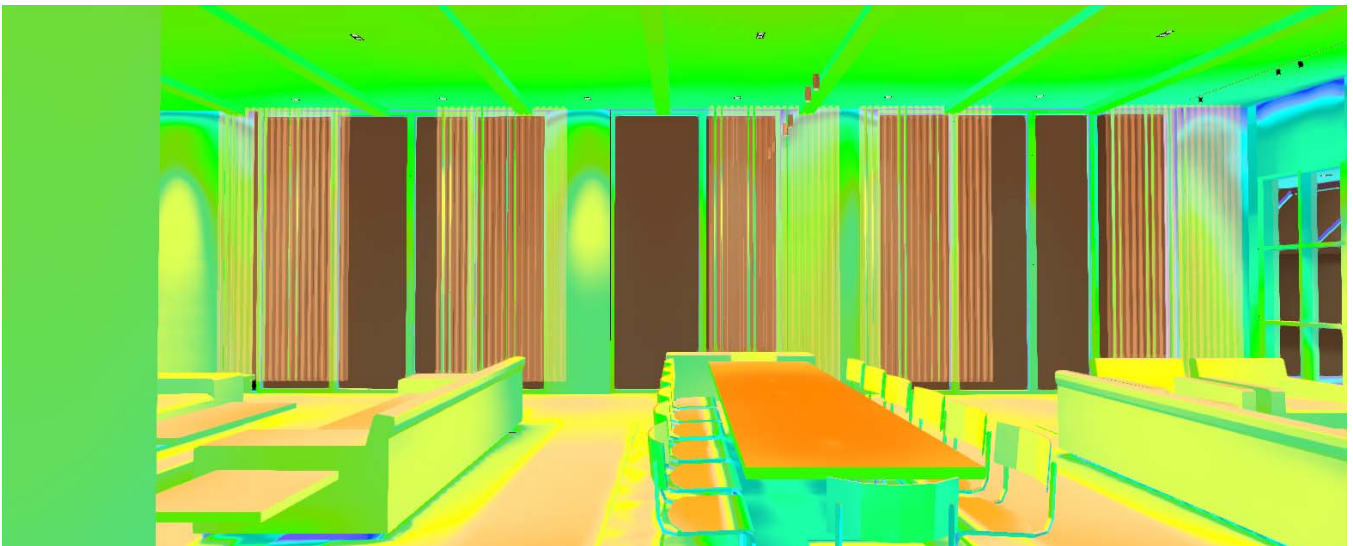



Images

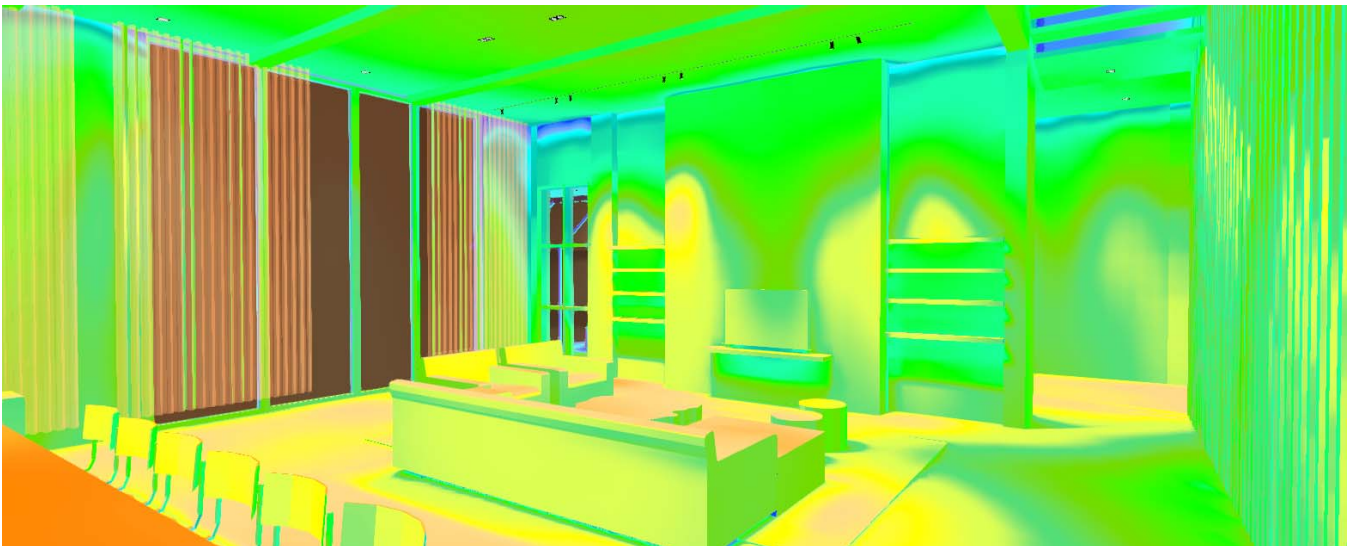



Images

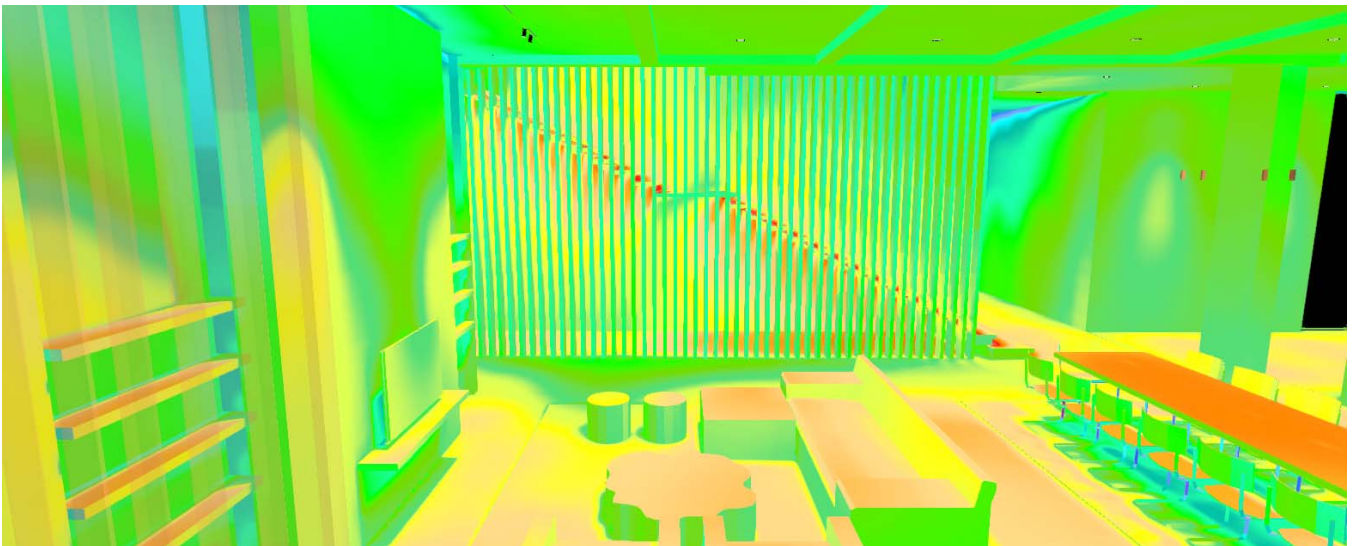



Images

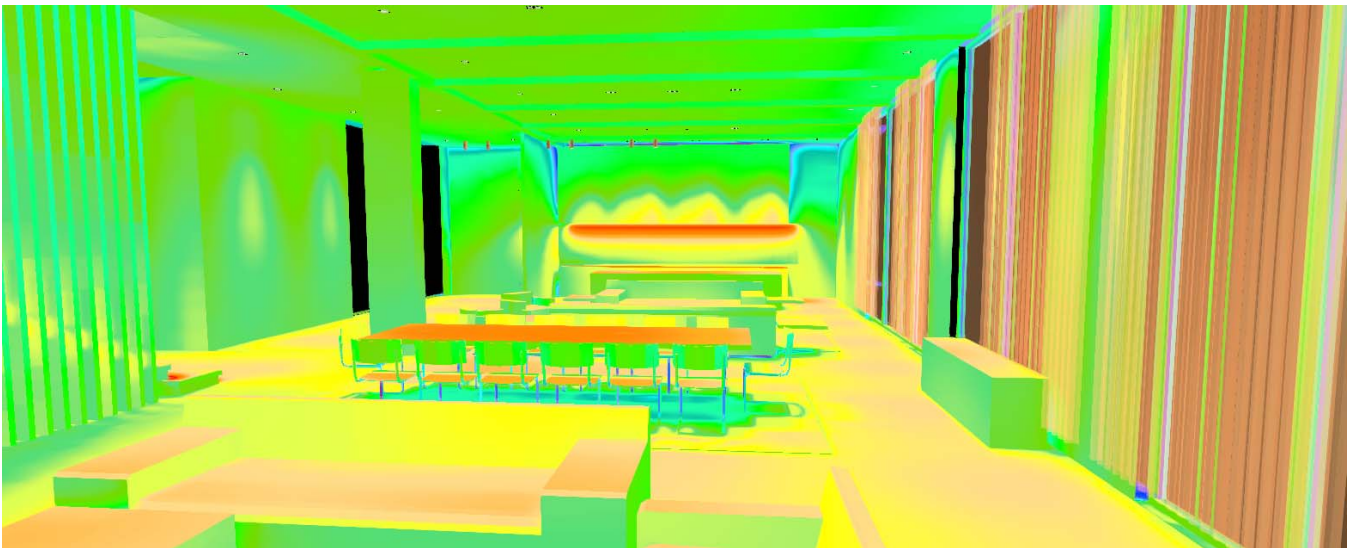


Images

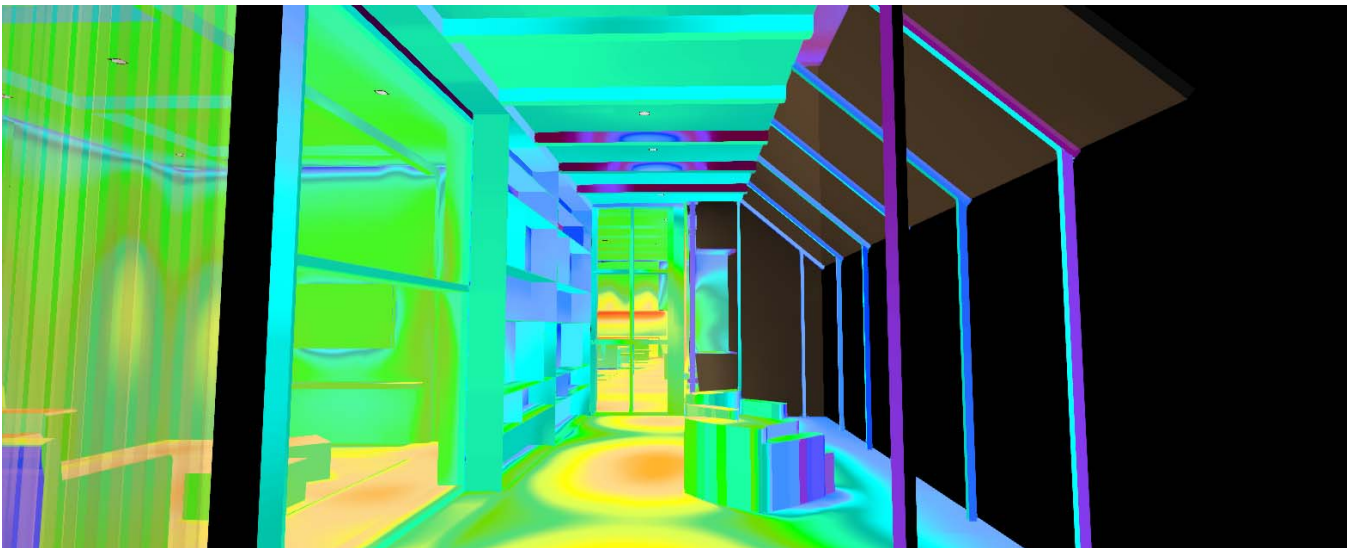



Images

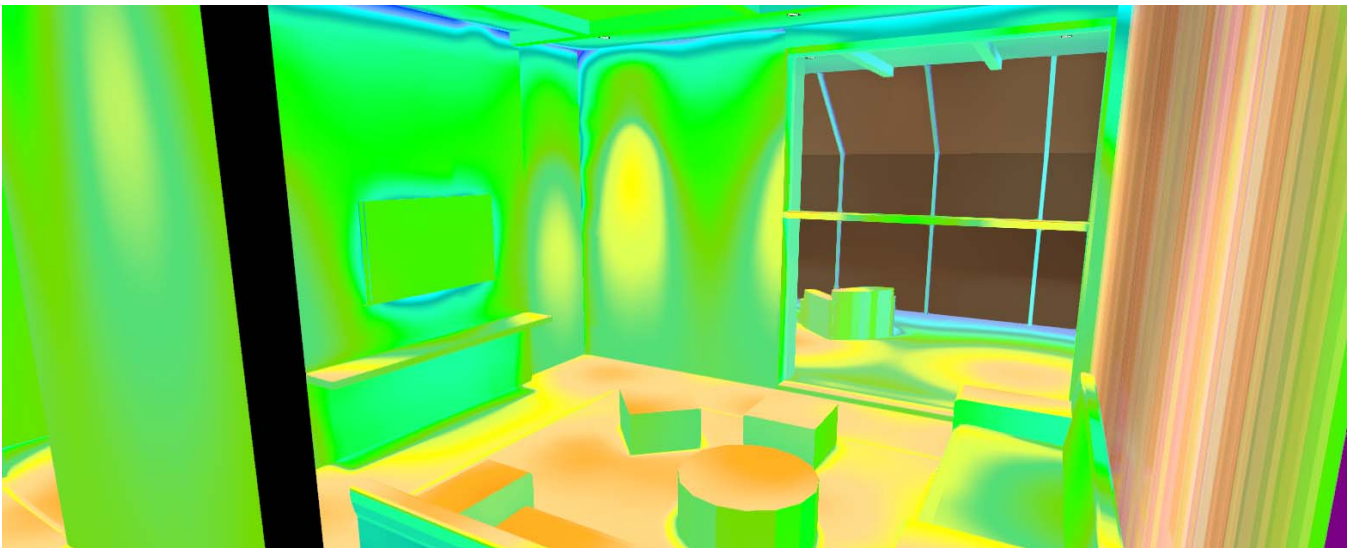




Images

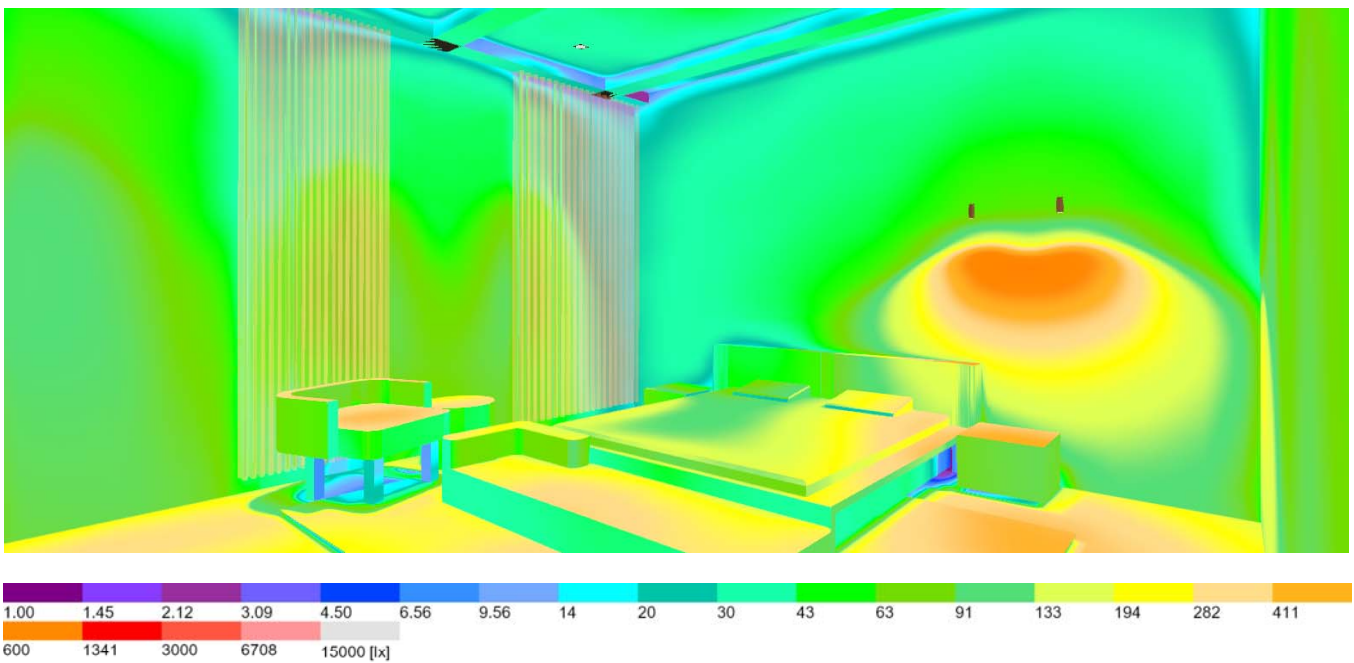

Images

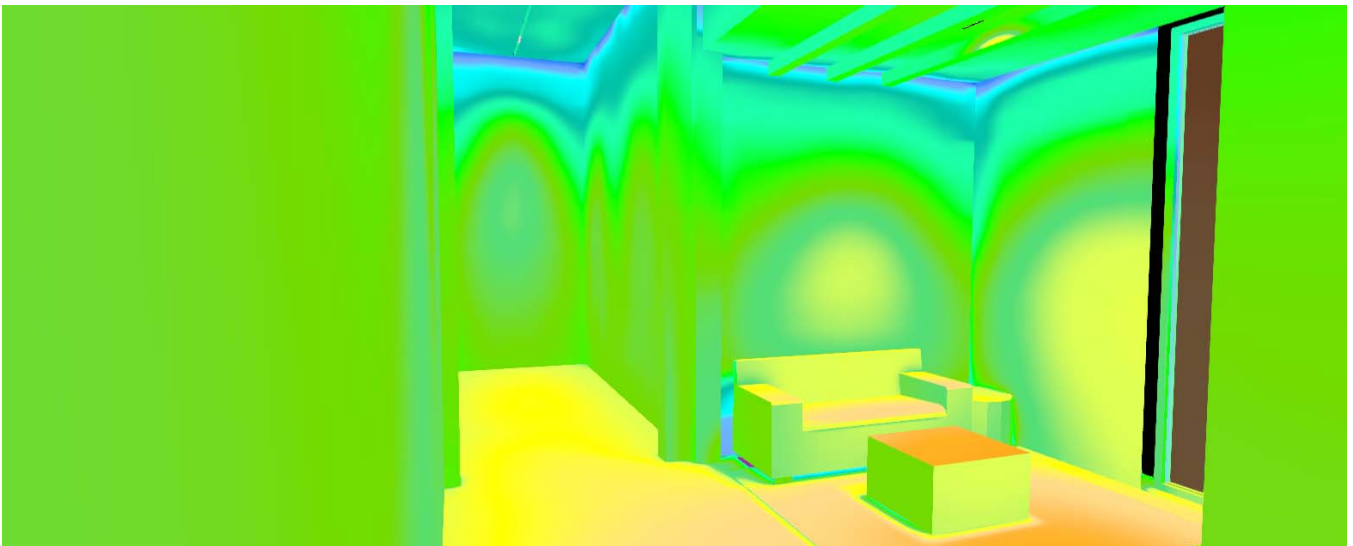

Images

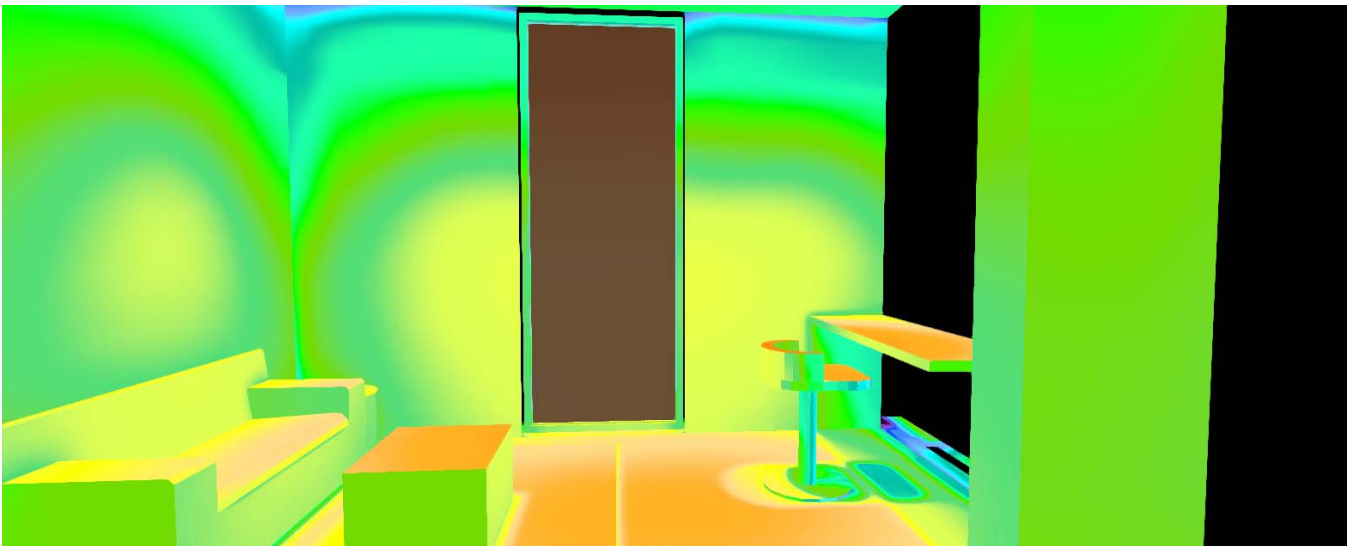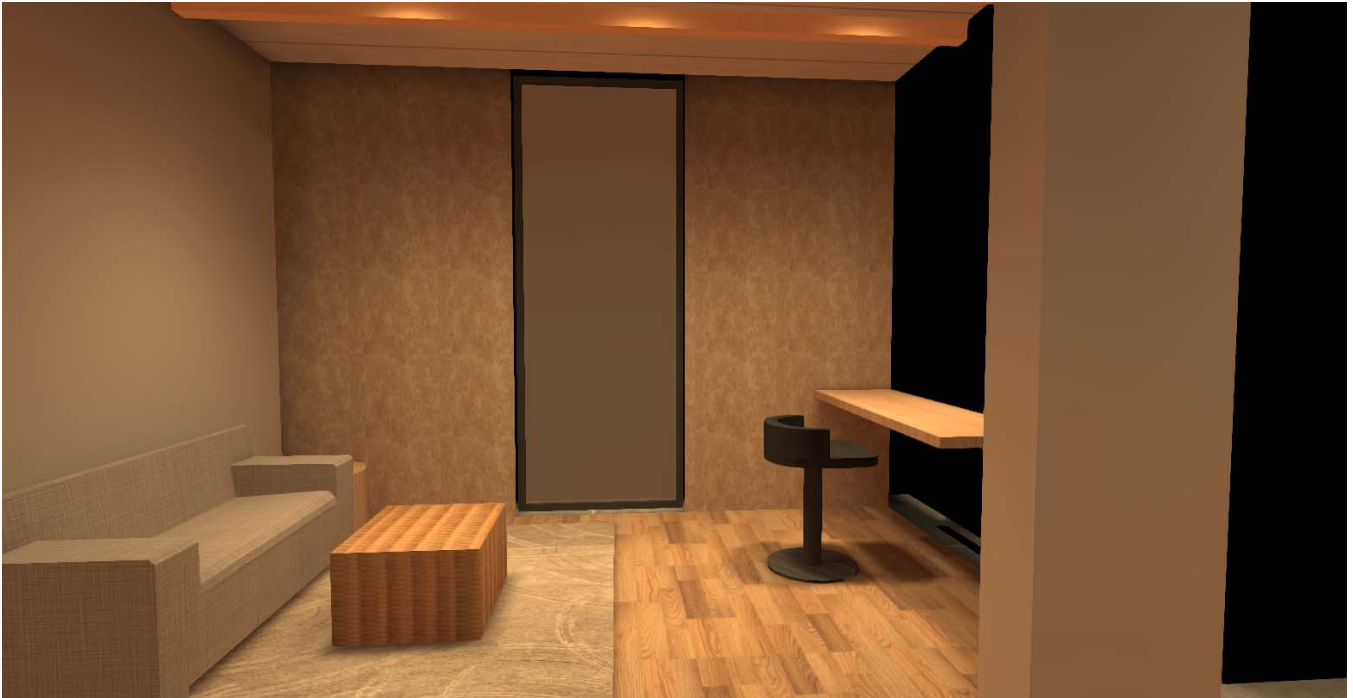

Product data sheet

NEKO - LED-Downlight



Article No. TAKEO T75
13W-3000K WW 50°
850lm


P 13.0 W

$\Phi_{\text{Luminaire}}$ 850 lm

Luminous efficacy 65.4 lm/W

CCT 3000 K

CRI 90

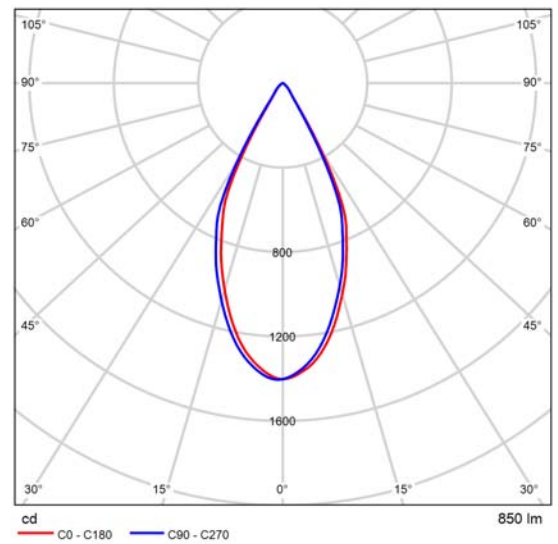

Polar LDC


Specification

Product data sheet

NEKO - LED-Downlight



Article No.	TAKEO TS150 28W-3000K/70°Ra90
P	28.0 W
$\Phi_{\text{Luminaire}}$	2100 lm
Luminous efficacy	75.0 lm/W
CCT	3000 K
CRI	90

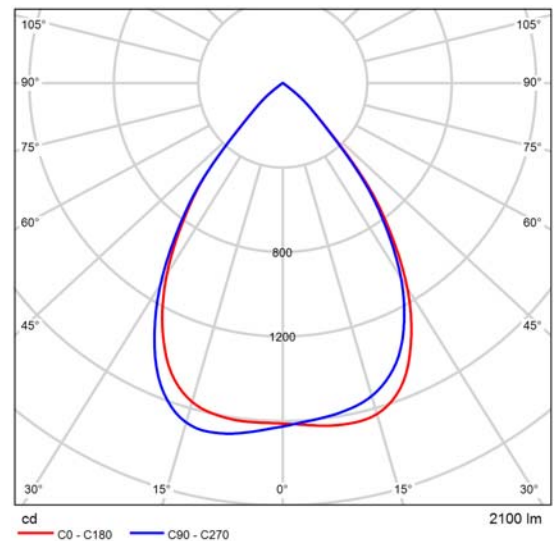

Polar LDC

Specification


Product data sheet

NEKO - LED-Lamps



Article No.	LED CLLE 8W-3000K/120°
P	8.0 W
$\Phi_{\text{Luminaire}}$	800 lm
Luminous efficacy	100.0 lm/W
CCT	3000 K
CRI	90

Description

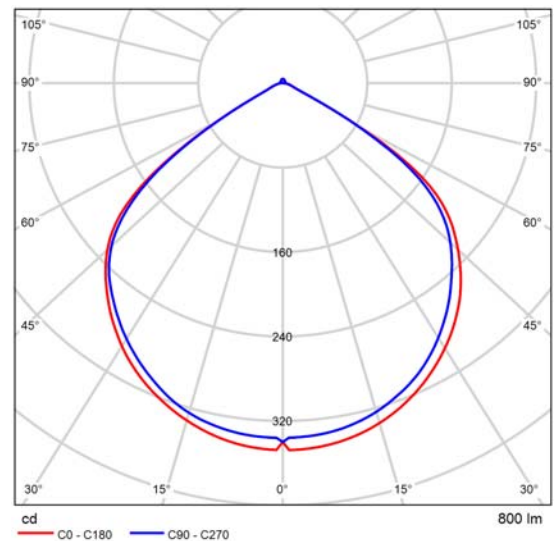


Polar LDC

Product data sheet

NEKO - LED-Lamps



Article No.	SL2835A/IP20 6W 500mm 3000K
P	6.0 W
$\Phi_{\text{Luminaire}}$	550 lm
Luminous efficacy	91.7 lm/W
CCT	3000 K
CRI	90

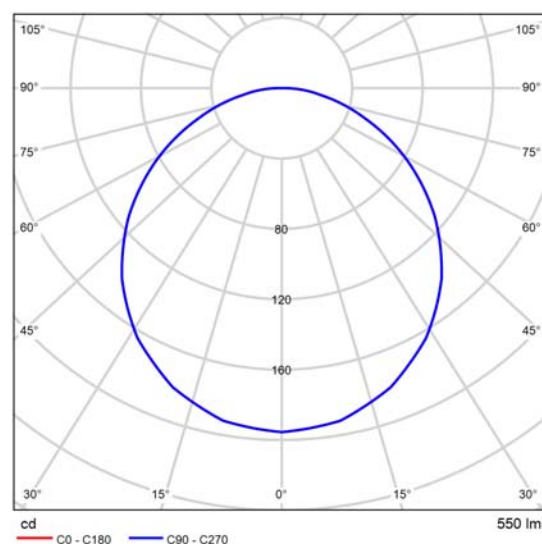

Polar LDC

Specification

Glare evaluation according to UGR												
μ Ceiling	70	70	50	50	30	70	70	50	50	30		
μ Walls	50	30	50	30	30	50	30	50	30	30		
μ Floor	20	20	20	20	20	20	20	20	20	20		
Room size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	23.2	24.6	23.5	24.8	25.0	23.8	25.2	24.1	25.4	25.7	
	3H	24.5	25.7	24.8	26.0	26.2	25.3	26.6	25.6	26.8	27.1	
	4H	24.9	26.1	25.3	26.4	26.7	25.9	27.1	26.3	27.4	27.7	
	6H	25.3	26.3	25.6	26.7	27.0	26.4	27.5	26.8	27.8	28.1	
	8H	25.3	26.4	25.7	26.7	27.0	26.6	27.6	27.0	28.0	28.3	
	12H	25.4	26.4	25.8	26.7	27.1	26.7	27.8	27.1	28.1	28.4	
4H	2H	23.8	25.0	24.2	25.3	25.6	24.3	25.5	24.7	25.8	26.1	
	3H	25.3	26.3	25.7	26.6	27.0	26.0	27.0	26.4	27.3	27.7	
	4H	25.9	26.8	26.3	27.1	27.5	26.7	27.6	27.1	28.0	28.4	
	6H	26.3	27.1	26.7	27.5	27.9	27.3	28.1	27.8	28.5	28.9	
	8H	26.4	27.2	26.9	27.6	28.0	27.6	28.3	28.0	28.7	29.1	
	12H	26.5	27.2	27.0	27.6	28.1	27.8	28.5	28.2	28.9	29.3	
8H	4H	26.2	26.9	26.6	27.3	27.7	26.9	27.7	27.4	28.1	28.5	
	6H	26.7	27.3	27.2	27.7	28.2	27.6	28.2	28.1	28.7	29.1	
	8H	26.9	27.4	27.4	27.9	28.4	28.0	28.5	28.4	28.9	29.4	
	12H	27.1	27.5	27.6	28.0	28.5	28.3	28.7	28.7	29.2	29.7	
	4H	26.2	26.9	26.6	27.3	27.7	26.9	27.6	27.4	28.0	28.5	
	6H	26.8	27.3	27.2	27.7	28.2	27.7	28.2	28.1	28.7	29.1	
12H	8H	27.0	27.5	27.5	27.9	28.4	28.0	28.5	28.5	29.0	29.5	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.1 / -0.2					+0.1 / -0.1					
S = 1.5H		+0.3 / -0.5					+0.2 / -0.3					
S = 2.0H		+0.5 / -0.9					+0.5 / -0.6					
Standard table		BK05					BK06					
Correction summand		9.6					11.0					
Corrected glare indices referring to 550lm Total luminous flux												


UGR diagram (SHR: 0.25)

Product data sheet

NEKO - LED-Lamps



Article No.	SL2835A/IP65 6W 500mm 3000K
P	6.0 W
$\Phi_{\text{Luminaire}}$	500 lm
Luminous efficacy	83.4 lm/W
CCT	3000 K
CRI	90

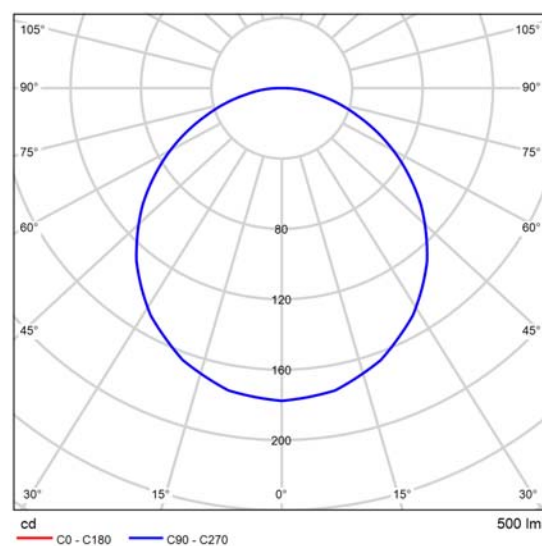

Polar LDC

Specification

Glare evaluation according to UGR												
μ Ceiling		70	70	50	50	30	70	70	50	50	30	
μ Walls		50	30	50	30	30	50	30	50	30	30	
μ Floor		20	20	20	20	20	20	20	20	20	20	
Room size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	22.9	24.2	23.2	24.5	24.7	23.5	24.8	23.8	25.1	25.3	
	3H	24.1	25.4	24.5	25.6	25.9	25.0	26.2	25.3	26.5	26.8	
	4H	24.6	25.8	25.0	26.1	26.4	25.6	26.8	25.9	27.1	27.4	
	6H	24.9	26.0	25.3	26.3	26.6	26.1	27.2	26.4	27.5	27.8	
	8H	25.0	26.1	25.4	26.4	26.7	26.3	27.3	26.6	27.6	28.0	
	12H	25.1	26.1	25.4	26.4	26.7	26.4	27.4	26.8	27.8	28.1	
4H	2H	23.5	24.7	23.8	25.0	25.3	24.0	25.2	24.3	25.5	25.8	
	3H	25.0	26.0	25.3	26.3	26.6	25.7	26.7	26.1	27.0	27.3	
	4H	25.6	26.5	26.0	26.8	27.2	26.4	27.3	26.8	27.7	28.0	
	6H	26.0	26.8	26.4	27.1	27.5	27.0	27.8	27.4	28.2	28.6	
	8H	26.1	26.8	26.5	27.2	27.7	27.2	28.0	27.7	28.4	28.8	
	12H	26.2	26.9	26.6	27.3	27.7	27.4	28.1	27.9	28.5	29.0	
8H	4H	25.8	26.6	26.3	27.0	27.4	26.6	27.3	27.0	27.7	28.2	
	6H	26.4	27.0	26.8	27.4	27.9	27.3	27.9	27.8	28.3	28.8	
	8H	26.6	27.1	27.1	27.6	28.0	27.6	28.2	28.1	28.6	29.1	
	12H	26.7	27.2	27.2	27.7	28.2	27.9	28.4	28.4	28.9	29.4	
12H	4H	25.8	26.5	26.3	26.9	27.4	26.6	27.3	27.0	27.7	28.1	
	6H	26.4	27.0	26.9	27.4	27.9	27.3	27.9	27.8	28.3	28.8	
	8H	26.7	27.1	27.2	27.6	28.1	27.7	28.2	28.2	28.6	29.1	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.1 / -0.2					+0.1 / -0.1					
S = 1.5H		+0.3 / -0.5					+0.2 / -0.3					
S = 2.0H		+0.5 / -0.9					+0.5 / -0.6					
Standard table		BK05					BK06					
Correction summand		9.2					10.7					
Corrected glare indices referring to 500lm Total luminous flux												

UGR diagram (SHR: 0.25)


Product data sheet

NEKO - LED-Magnet Track Light



Article No.	ML26-R2-8W 30° 3000K BB
P	8.0 W
$\Phi_{\text{Luminaire}}$	580 lm
Luminous efficacy	72.5 lm/W
CCT	3000 K
CRI	90

Specification

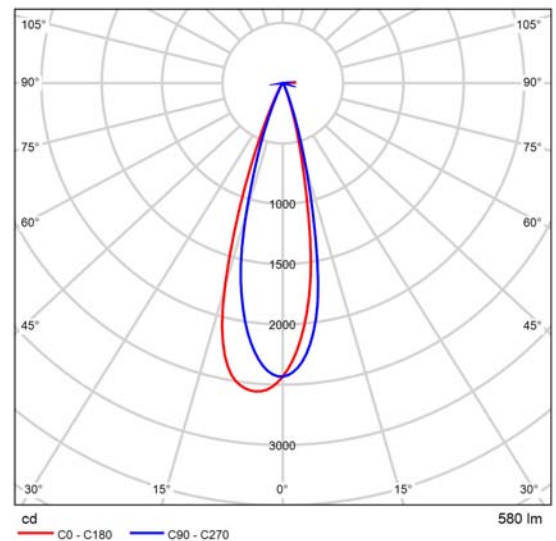

Polar LDC


Product data sheet

NEKO - LED-Multiple DownLight



Article No.	TSA1D 2×15W BB 3000K 60°
P	30.0 W
$\Phi_{\text{Luminaire}}$	2000 lm
Luminous efficacy	66.7 lm/W
CCT	3000 K
CRI	90

Specification

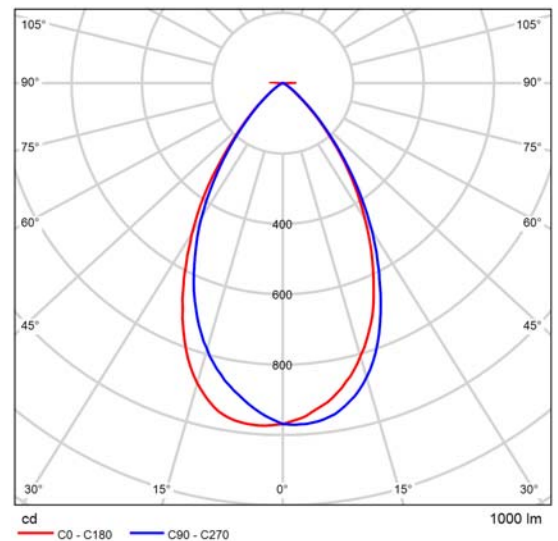

Polar LDC for Light emission 1 and 2


Product data sheet

NEKO - LED-SpotLight



Article No.	CLUB TSA3 M3 13W 35°3000K BBM
P	13.0 W
$\Phi_{\text{Luminaire}}$	700 lm
Luminous efficacy	53.8 lm/W
CCT	3000 K
CRI	90

Description

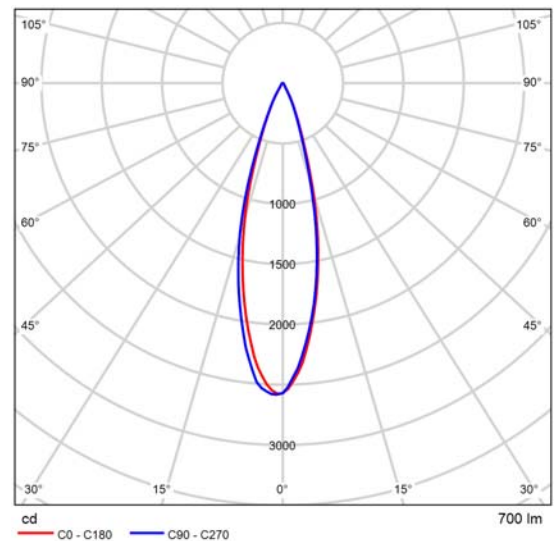

Polar LDC


Product data sheet

NEKO - LED-SpotLight



Article No.	CLUB TSA3 M4 15W 35°3000K BBM
P	15.0 W
$\Phi_{\text{Luminaire}}$	900 lm
Luminous efficacy	60.0 lm/W
CCT	3000 K
CRI	90

Description

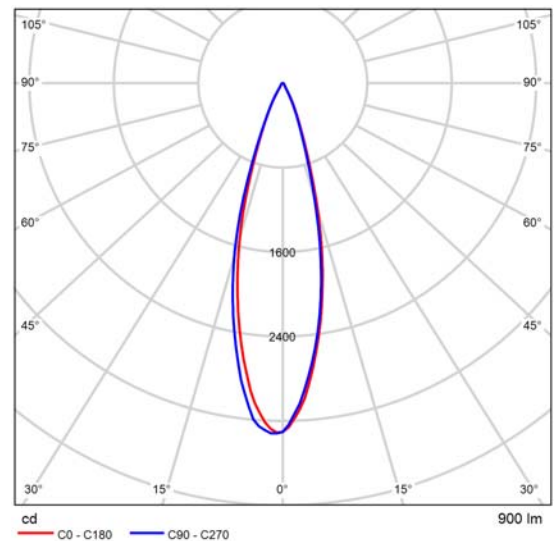

Polar LDC


Product data sheet

NEKO - LED-SpotLight



Article No.	MINUX 44 WC 11W 40°3000K
P	11.0 W
$\Phi_{\text{Luminaire}}$	850 lm
Luminous efficacy	77.3 lm/W
CCT	3000 K
CRI	90

Description

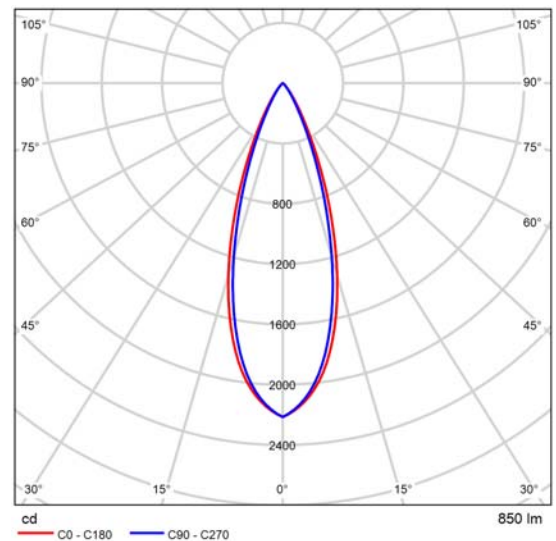

Polar LDC


Product data sheet

NEKO - LED-SpotLight



Article No.	ML26- MLA2-13W-3000K/35
P	13.0 W
$\Phi_{\text{Luminaire}}$	1100 lm
Luminous efficacy	84.6 lm/W
CCT	3000 K
CRI	90


Description

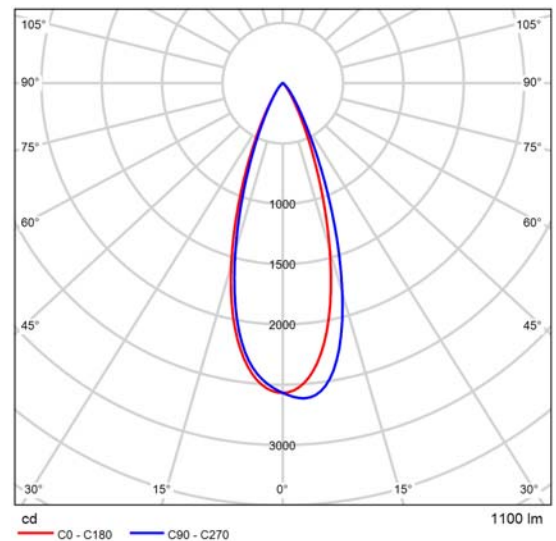

Polar LDC

Building 1 (Light scene 1)

Summary

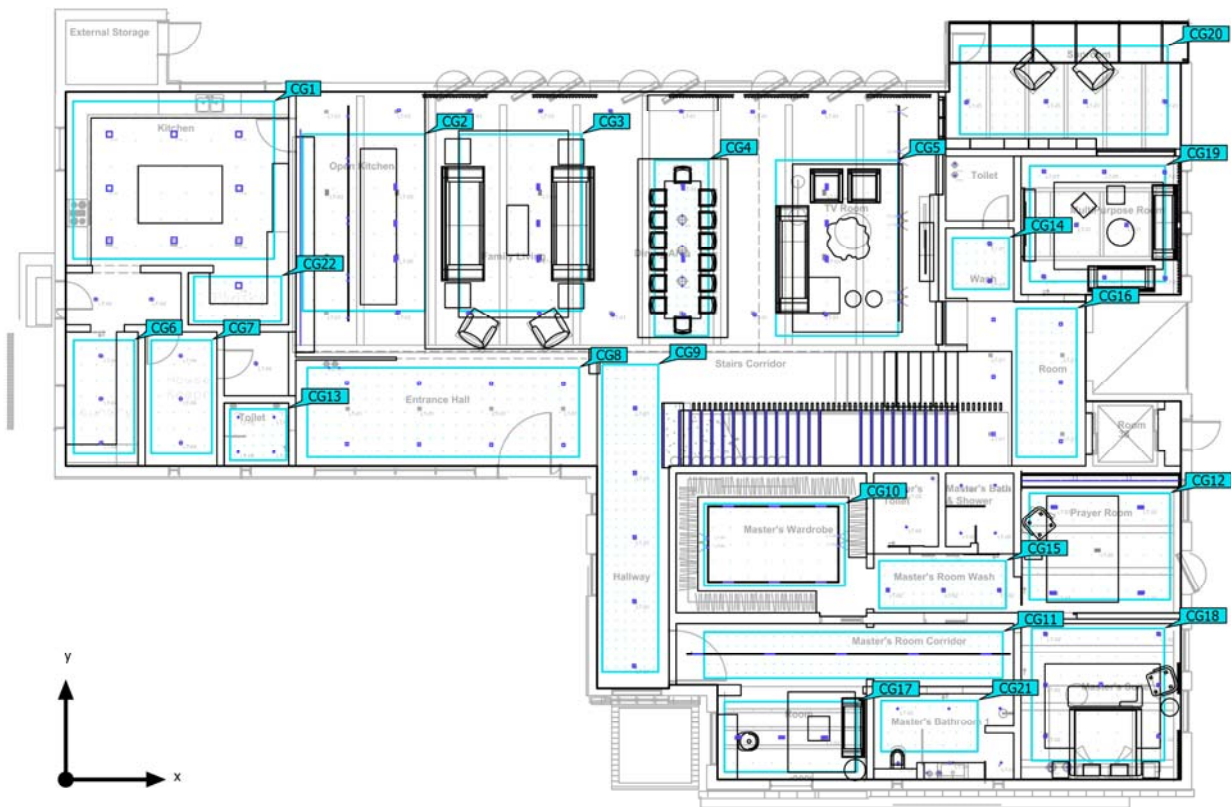

Ground area 462.83 m²

Reflection factors Ceiling: 70.0 %, Walls: 46.8 %, Floor: 30.0 %

Maintenance factor 0.80 (fixed)

Clearance height 2.900 m – 5.000 m

Mounting height 0.099 m – 4.094 m

Building 1 (Light scene 1)

Summary

Results

	Symbol	Calculated	Target	Check	Index
Glare valuation ⁽¹⁾	R _{UG, max}	19	≤ 19	✓	
Energy estimation ⁽²⁾	Consumption	[5073.45 - 7739.33] kWh/a	max. 16250 kWh/a	✓	
Room	Lighting power density	6.76 W/m ²	–		

(1) Based on a rectangular space of 31.259 m x 21.124 m and SHR of 0.25.

(2) Calculated using DIN:18599-4.

Utilisation profile: DIALux presetting (34.2 Standard (office))

Luminaire list

pcs.	Manufacturer	Article No.	Article name	R _{UG}	P	Φ	Luminous efficacy
10	NEKO	CLUB TSA3 M3 13W 35°3000K BBM	LED-SpotLight	–	13.0 W	700 lm	53.8 lm/W
47	NEKO	CLUB TSA3 M4 15W 35°3000K BBM	LED-SpotLight	–	15.0 W	900 lm	60.0 lm/W
15	NEKO	LED CLLE 8W-3000K/120°	LED-Lamps	–	8.0 W	800 lm	100.0 lm/W
16	NEKO	MINUX 44 WC 11W 40°3000K	LED-SpotLight	16	11.0 W	850 lm	77.3 lm/W
11	NEKO	ML26-MLA2-13W -3000K/35°	LED-SpotLight	–	13.0 W	1100 lm	84.6 lm/W

Building 1 (Light scene 1)


Summary

Luminaire list

pcs.	Manufacturer	Article No.	Article name	R _{UG}	P	Φ	Luminous efficacy
19	NEKO	ML26-R2-8W 30° 3000K BB	LED-Magnet Track Light	–	8.0 W	580 lm	72.5 lm/W
48	NEKO	SL2835A/ IP20 6W 500mm 3000K	LED-Lamps	19	6.0 W	550 lm	91.7 lm/W
84	NEKO	SL2835A/ IP65 6W 500mm 3000K	LED-Lamps	19	6.0 W	500 lm	83.4 lm/W
9	NEKO	TAKEO T75 13W-3000 K WW 50° 850lm	LED-Downlight	–	13.0 W	850 lm	65.4 lm/W
9	NEKO	TAKEO TS150 28W-3000 K/70°Ra90	LED-Downlight	–	28.0 W	2100 lm	75.0 lm/W
18	NEKO	TSA1D 2×15W BB 3000K 60°	LED-Multiple DownLight	–	30.0 W	2000 lm	66.7 lm/W

Building 1 (Light scene 1)

Calculation objects

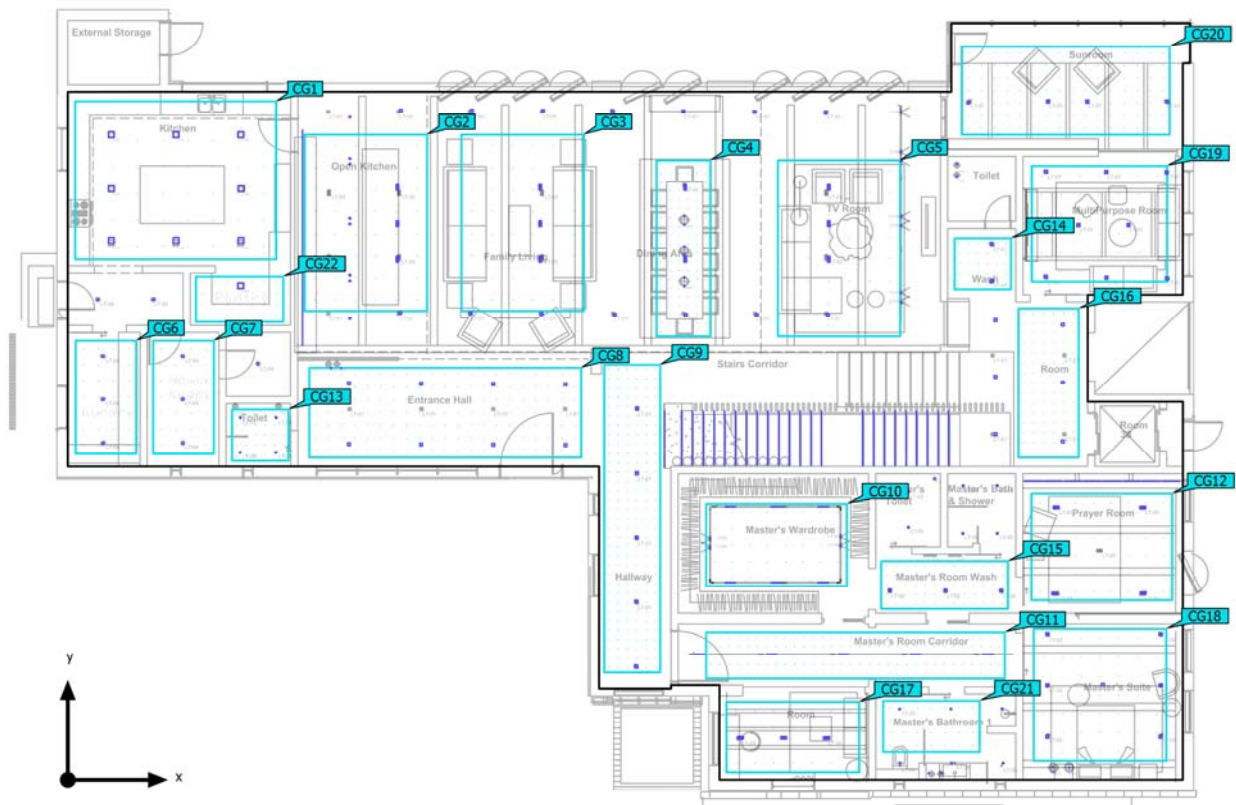

Building 1 (Light scene 1)

Calculation objects

Calculation surfaces

Properties	\bar{E}	E_{min}	E_{max}	$U_o (g_1)$	g_2	Index
KITCHEN Perpendicular illuminance Height: 0.850 m	482 lx	273 lx	645 lx	0.57	0.42	CG1
OPEN KITCHEN Perpendicular illuminance Height: 0.850 m	476 lx	237 lx	826 lx	0.50	0.29	CG2
FAMILY LIVING Perpendicular illuminance Height: 0.850 m	304 lx	182 lx	421 lx	0.60	0.43	CG3
DINING AREA Perpendicular illuminance Height: 0.850 m	497 lx	262 lx	650 lx	0.53	0.40	CG4
TV ROOM Perpendicular illuminance Height: 0.850 m	295 lx	95.2 lx	426 lx	0.32	0.22	CG5
LAUNDRY Perpendicular illuminance Height: 0.850 m	272 lx	172 lx	356 lx	0.63	0.48	CG6
HOUSE KEEPER Perpendicular illuminance Height: 0.850 m	271 lx	181 lx	343 lx	0.67	0.53	CG7
ENTRANCE HALL Perpendicular illuminance Height: 0.850 m	265 lx	160 lx	459 lx	0.60	0.35	CG8
HALLWAY Perpendicular illuminance Height: 0.850 m	215 lx	91.8 lx	337 lx	0.43	0.27	CG9
MASTER'S WARDROBE Perpendicular illuminance Height: 0.850 m	404 lx	303 lx	584 lx	0.75	0.52	CG10
MASTER'S ROOM CORRIDOR Perpendicular illuminance Height: 0.850 m	231 lx	170 lx	285 lx	0.74	0.60	CG11

Building 1 (Light scene 1)



Calculation objects

PRAYER ROOM Perpendicular illuminance Height: 0.850 m	700 lx	450 lx	1188 lx	0.64	0.38	CG12
TOILET 01 Perpendicular illuminance Height: 0.850 m	0.54 lx	0.17 lx	1.10 lx	0.31	0.15	CG13
WASH Perpendicular illuminance Height: 0.850 m	401 lx	89.2 lx	675 lx	0.22	0.13	CG14
MASTER'S ROOM WASH Perpendicular illuminance Height: 0.850 m	204 lx	143 lx	266 lx	0.70	0.54	CG15
Elevator lobby Perpendicular illuminance Height: 0.850 m	273 lx	184 lx	365 lx	0.67	0.50	CG16
Study room Perpendicular illuminance Height: 0.850 m	431 lx	218 lx	597 lx	0.51	0.37	CG17
MASTER'S SUITE Perpendicular illuminance Height: 0.850 m	239 lx	43.2 lx	642 lx	0.18	0.067	CG18
MULTIPURPOSE ROOM Perpendicular illuminance Height: 0.850 m	308 lx	86.6 lx	603 lx	0.28	0.14	CG19
SUNROOM Perpendicular illuminance Height: 0.850 m	164 lx	10.7 lx	606 lx	0.065	0.018	CG20
MASTER'S BATHROOM 1 Perpendicular illuminance Height: 0.850 m	404 lx	314 lx	498 lx	0.78	0.63	CG21
PANTRY Perpendicular illuminance Height: 0.850 m	330 lx	156 lx	521 lx	0.47	0.30	CG22

Utilisation profile: DIALux presetting (34.2 Standard (office))

Building 1 (Light scene 1)

KITCHEN

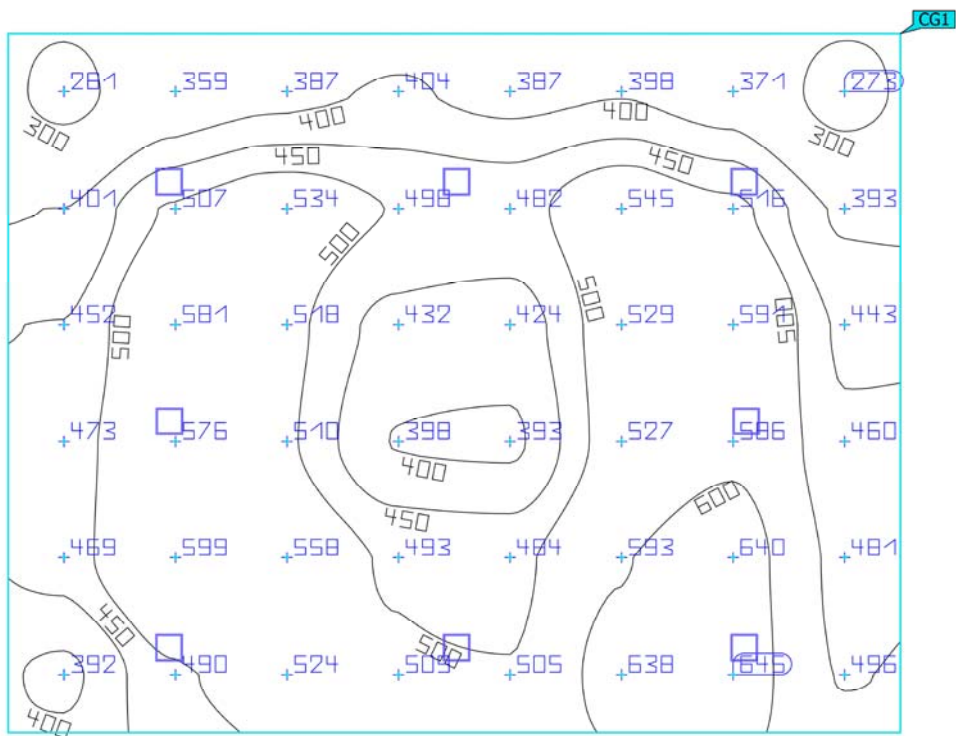



Properties	\bar{E}	E_{min}	E_{max}	$U_o (g_1)$	g_2	Index
KITCHEN Perpendicular illuminance Height: 0.850 m	482 lx	273 lx	645 lx	0.57	0.42	CG1

Utilisation profile: DIALux presetting (34.2 Standard (office))

Building 1 (Light scene 1)

OPEN KITCHEN

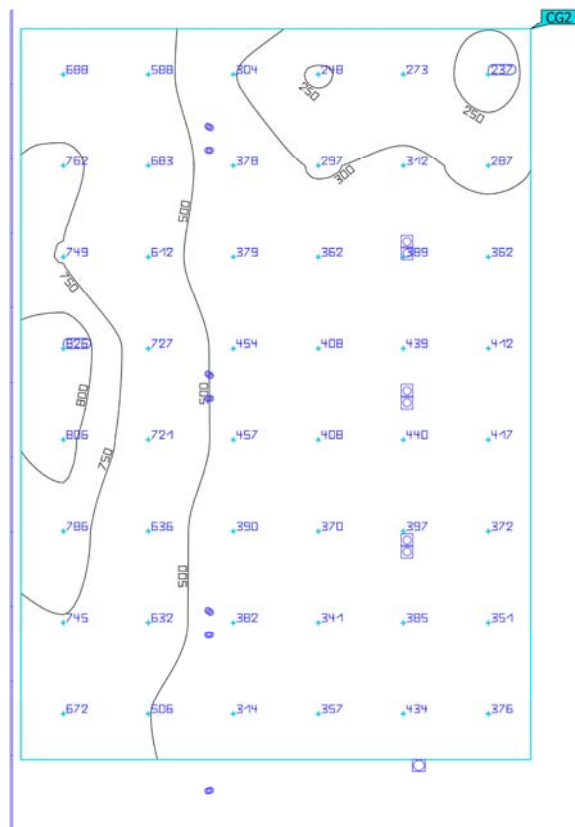



Properties	\bar{E}	E_{min}	E_{max}	$U_o (g_1)$	g_2	Index
OPEN KITCHEN Perpendicular illuminance Height: 0.850 m	476 lx	237 lx	826 lx	0.50	0.29	CG2

Utilisation profile: DIALux presetting (34.2 Standard (office))

Building 1 (Light scene 1)

FAMILY LIVING

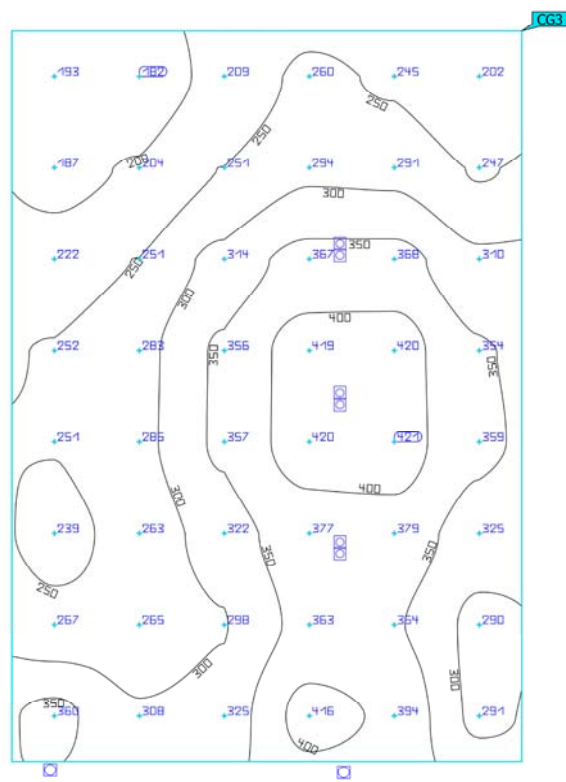



Properties	\bar{E}	E_{min}	E_{max}	$U_o (g_1)$	g_2	Index
FAMILY LIVING Perpendicular illuminance Height: 0.850 m	304 lx	182 lx	421 lx	0.60	0.43	CG3

Utilisation profile: DIALux presetting (34.2 Standard (office))

Building 1 (Light scene 1)

DINING AREA

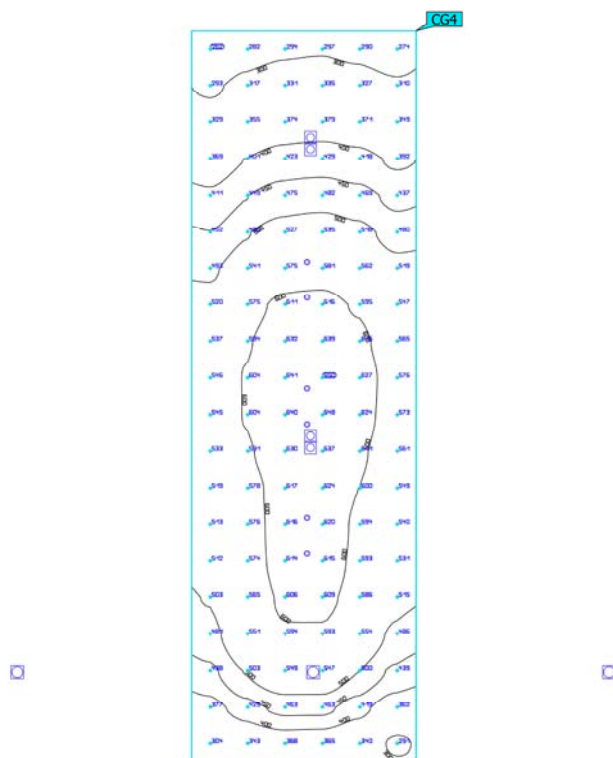



Properties	\bar{E}	E_{min}	E_{max}	$U_o (g_1)$	g_2	Index
DINING AREA Perpendicular illuminance Height: 0.850 m	497 lx	262 lx	650 lx	0.53	0.40	CG4

Utilisation profile: DIALux presetting (34.2 Standard (office))

Building 1 (Light scene 1)

TV ROOM

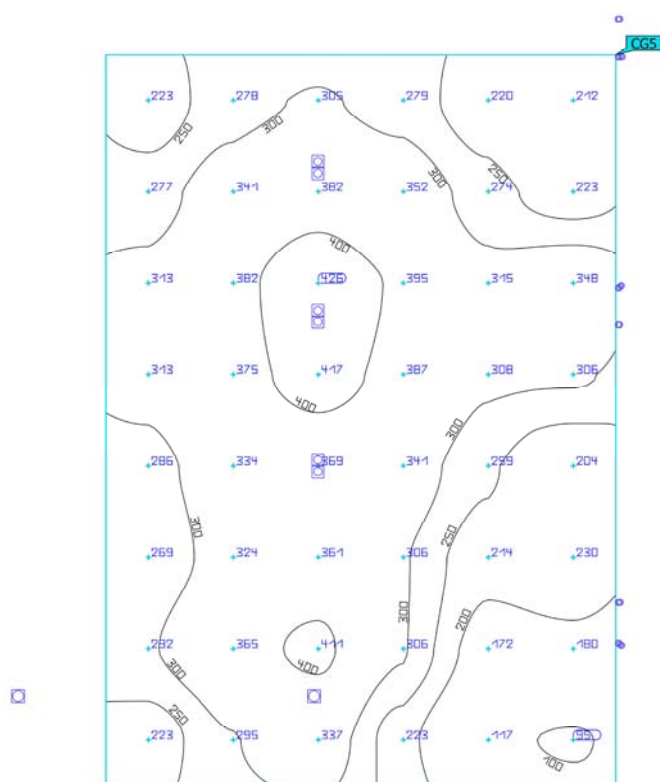



Properties	\bar{E}	E_{min}	E_{max}	$U_o (g_1)$	g_2	Index
TV ROOM Perpendicular illuminance Height: 0.850 m	295 lx	95.2 lx	426 lx	0.32	0.22	CG5

Utilisation profile: DIALux presetting (34.2 Standard (office))

Building 1 (Light scene 1)

LAUNDRY

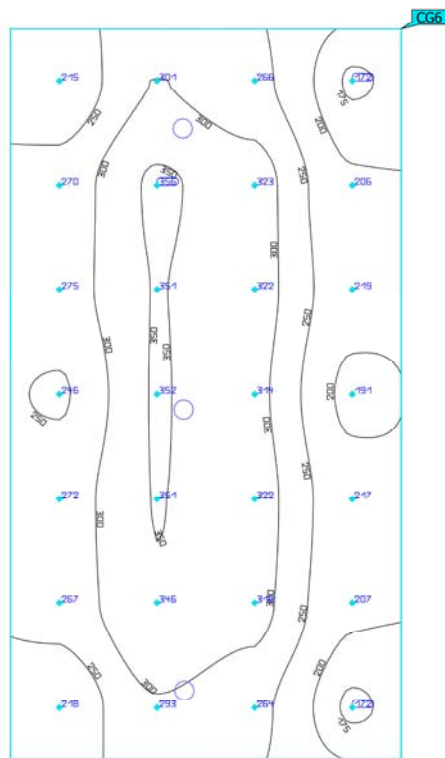



Properties	\bar{E}	E_{min}	E_{max}	$U_o (g_1)$	g_2	Index
LAUNDRY Perpendicular illuminance Height: 0.850 m	272 lx	172 lx	356 lx	0.63	0.48	CG6

Utilisation profile: DIALux presetting (34.2 Standard (office))

Building 1 (Light scene 1)

HOUSE KEEPER

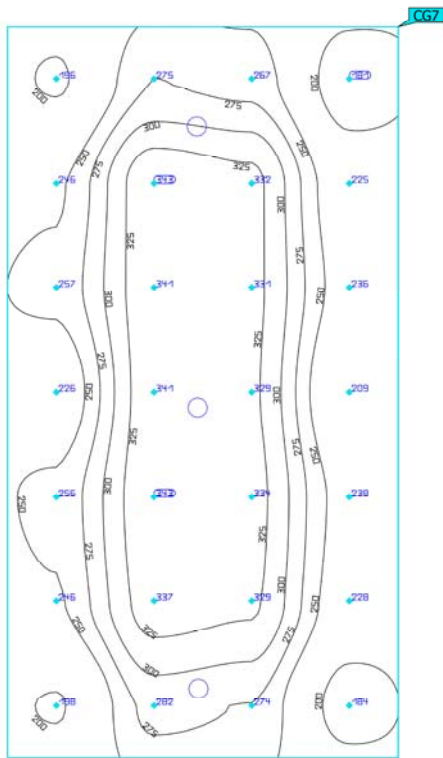


Properties	\bar{E}	E_{min}	E_{max}	$U_o (g_1)$	g_2	Index
HOUSE KEEPER Perpendicular illuminance Height: 0.850 m	271 lx	181 lx	343 lx	0.67	0.53	CG7


Utilisation profile: DIALux presetting (34.2 Standard (office))

Building 1 (Light scene 1)

ENTRANCE HALL



I

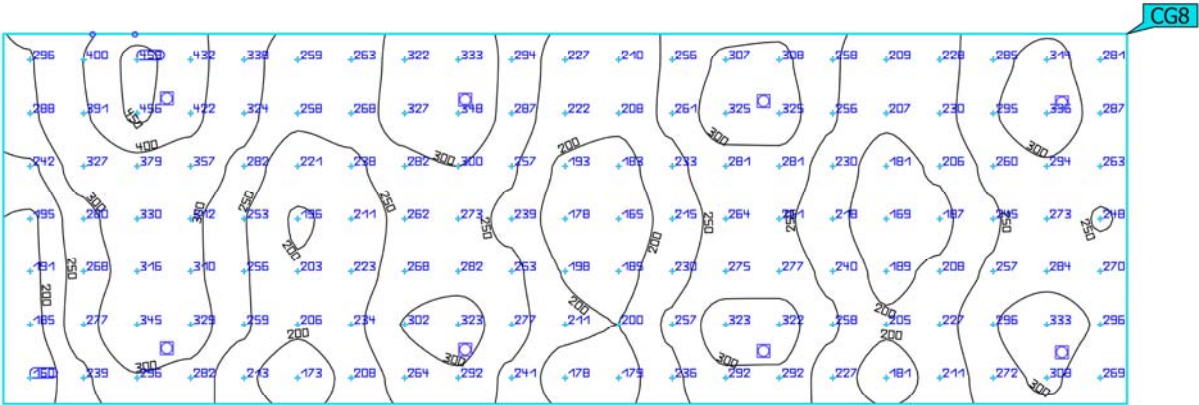


Properties	\bar{E}	E_{min}	E_{max}	$U_o (g_1)$	g_2	Index
ENTRANCE HALL Perpendicular illuminance Height: 0.850 m	265 lx	160 lx	459 lx	0.60	0.35	CG8

Utilisation profile: DIALux presetting (34.2 Standard (office))

Building 1 (Light scene 1)



HALLWAY

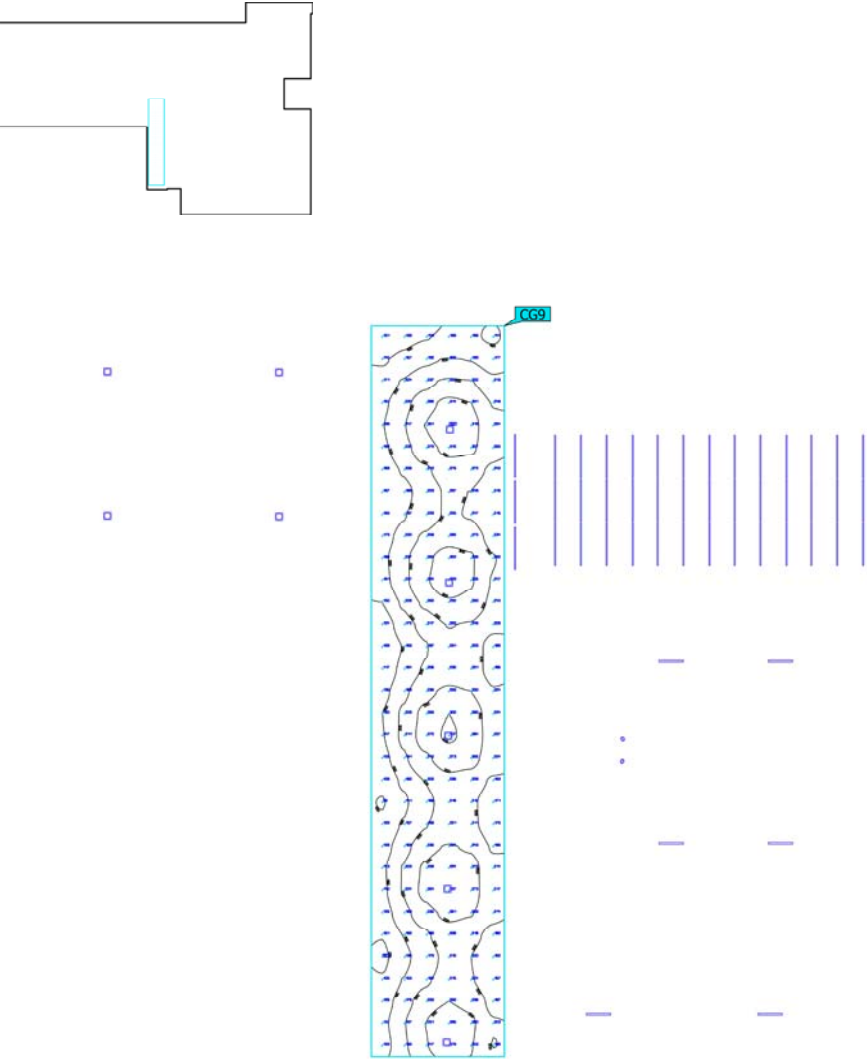

Properties	\bar{E}	E_{min}	E_{max}	$U_o (g_1)$	g_2	Index
HALLWAY Perpendicular illuminance Height: 0.850 m	215 lx	91.8 lx	337 lx	0.43	0.27	CG9

Utilisation profile: DIALux presetting (34.2 Standard (office))

Building 1 (Light scene 1)
MASTER'S WARDROBE

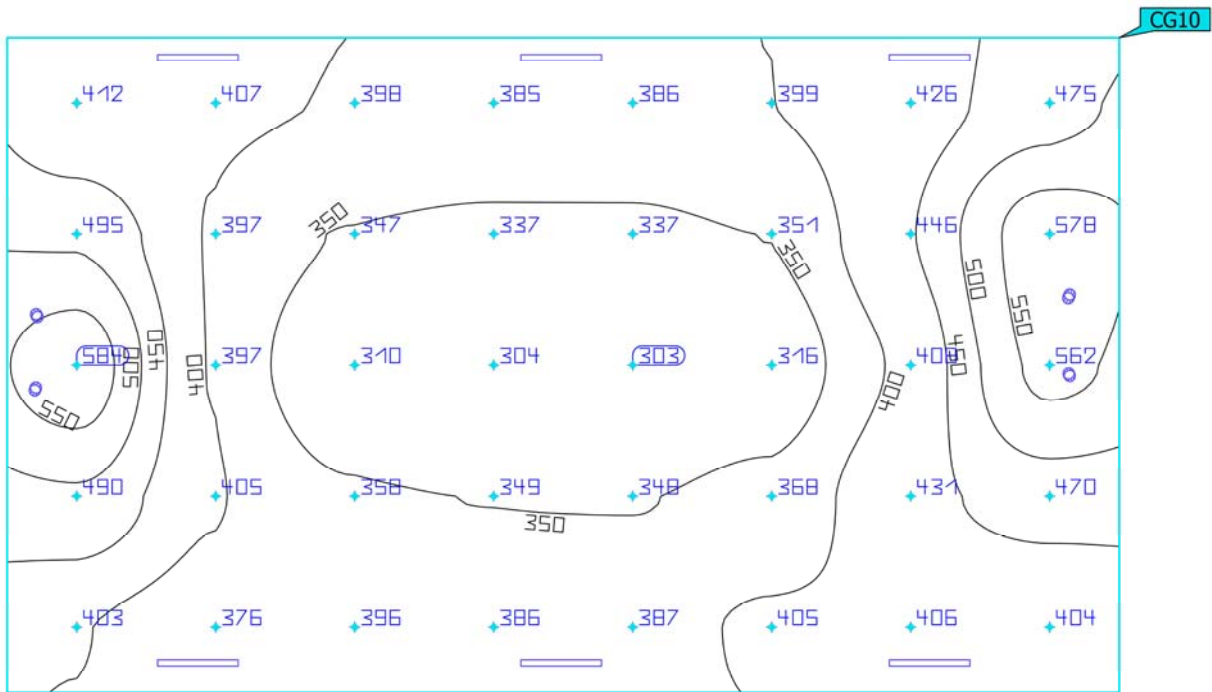



Properties	\bar{E}	E_{min}	E_{max}	$U_o (g_1)$	g_2	Index
MASTER'S WARDROBE Perpendicular illuminance Height: 0.850 m	404 lx	303 lx	584 lx	0.75	0.52	CG10

Utilisation profile: DIALux presetting (34.2 Standard (office))

Building 1 (Light scene 1)

MASTER'S ROOM CORRIDOR

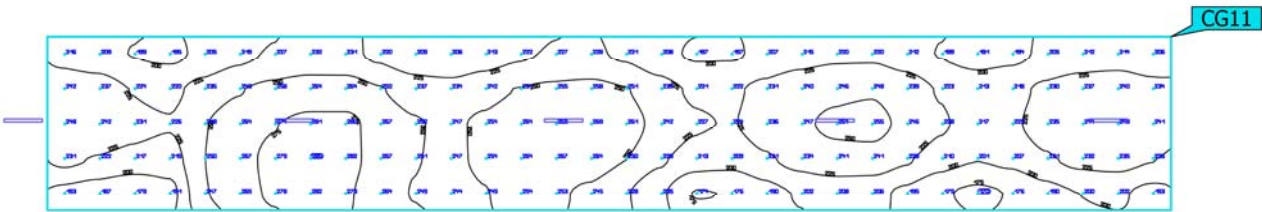



Properties	\bar{E}	E_{min}	E_{max}	$U_o (g_1)$	g_2	Index
MASTER'S ROOM CORRIDOR Perpendicular illuminance Height: 0.850 m	231 lx	170 lx	285 lx	0.74	0.60	CG11

Utilisation profile: DIALux presetting (34.2 Standard (office))

Building 1 (Light scene 1)

PRAYER ROOM

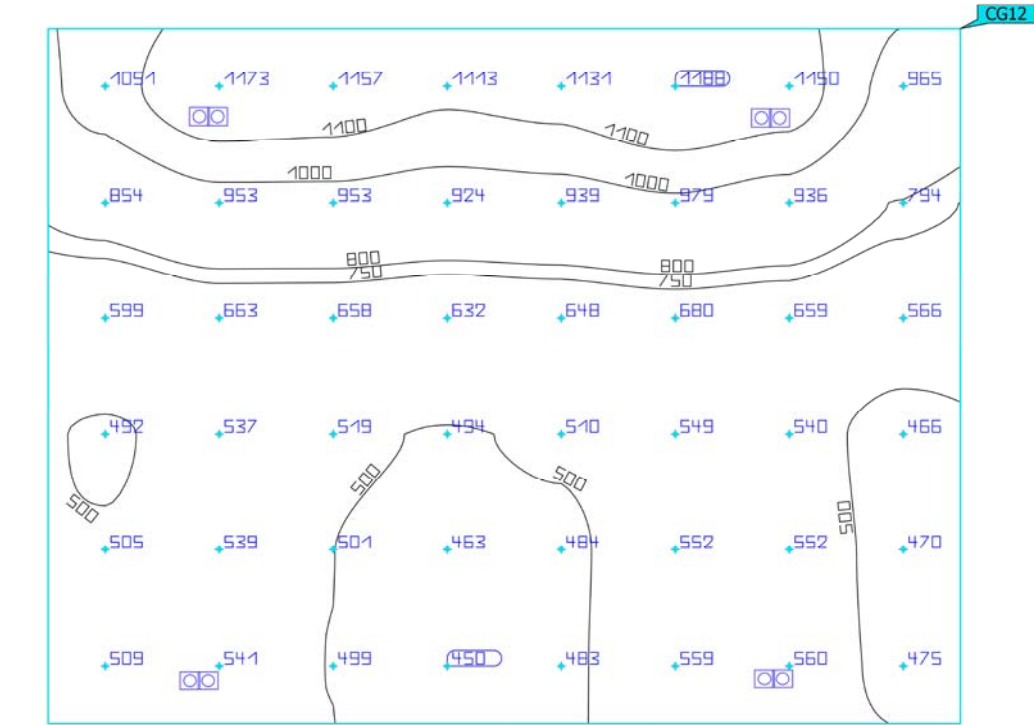



Properties	\bar{E}	E_{min}	E_{max}	$U_o (g_1)$	g_2	Index
PRAYER ROOM Perpendicular illuminance Height: 0.850 m	700 lx	450 lx	1188 lx	0.64	0.38	CG12

Utilisation profile: DIALux presetting (34.2 Standard (office))

Building 1 (Light scene 1)

TOILET 01

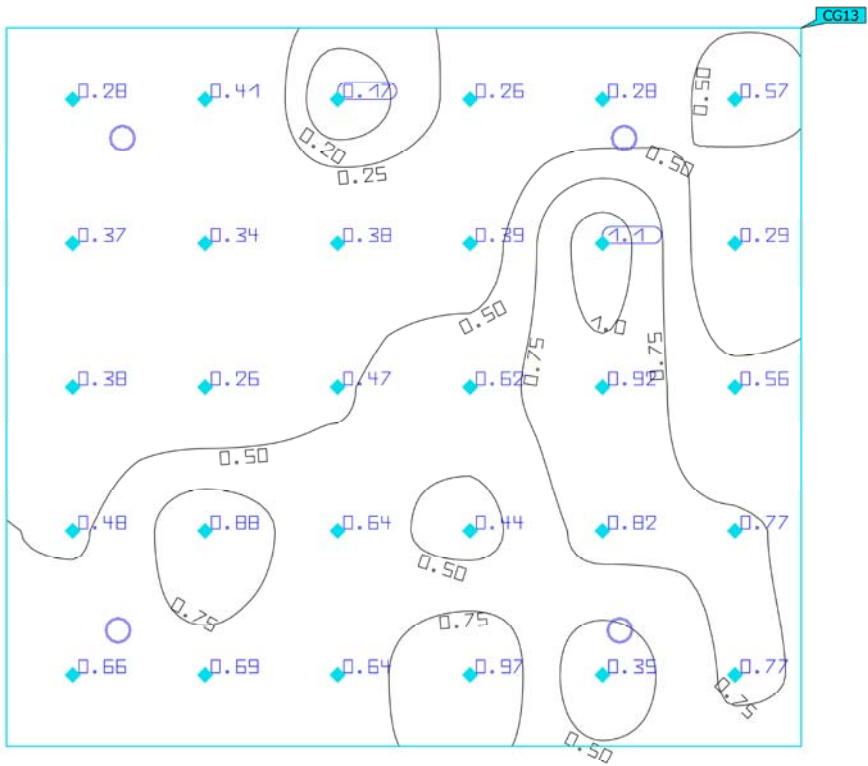



Properties	\bar{E}	E_{min}	E_{max}	$U_o (g_1)$	g_2	Index
TOILET 01 Perpendicular illuminance Height: 0.850 m	0.54 lx	0.17 lx	1.10 lx	0.31	0.15	CG13

Utilisation profile: DIALux presetting (34.2 Standard (office))

Building 1 (Light scene 1)

WASH

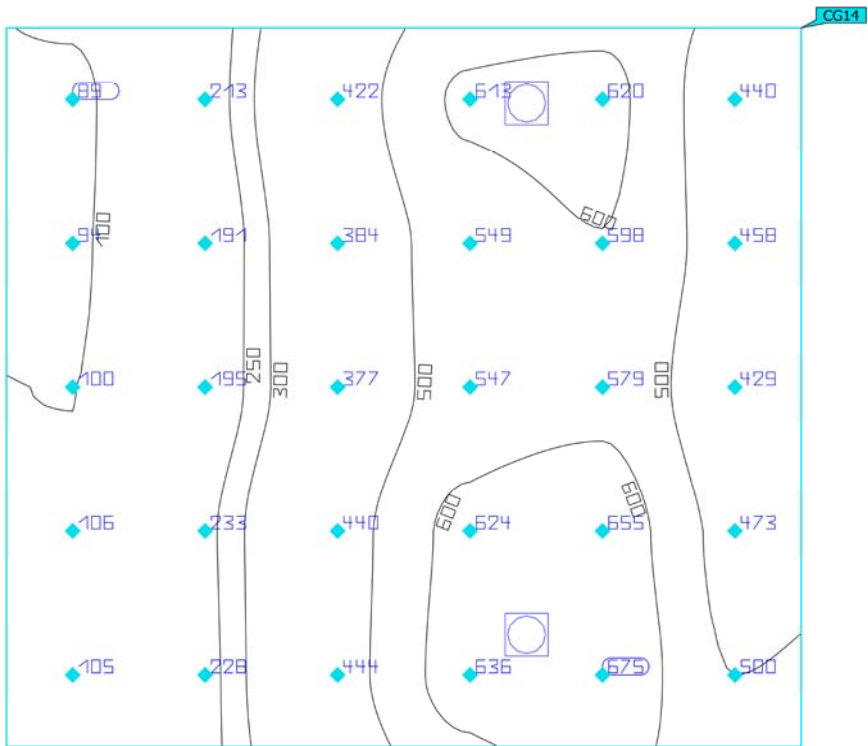



Properties	\bar{E}	E_{min}	E_{max}	$U_o (g_1)$	g_2	Index
WASH Perpendicular illuminance Height: 0.850 m	401 lx	89.2 lx	675 lx	0.22	0.13	CG14

Utilisation profile: DIALux presetting (34.2 Standard (office))

Building 1 (Light scene 1)



MASTER'S ROOM WASH

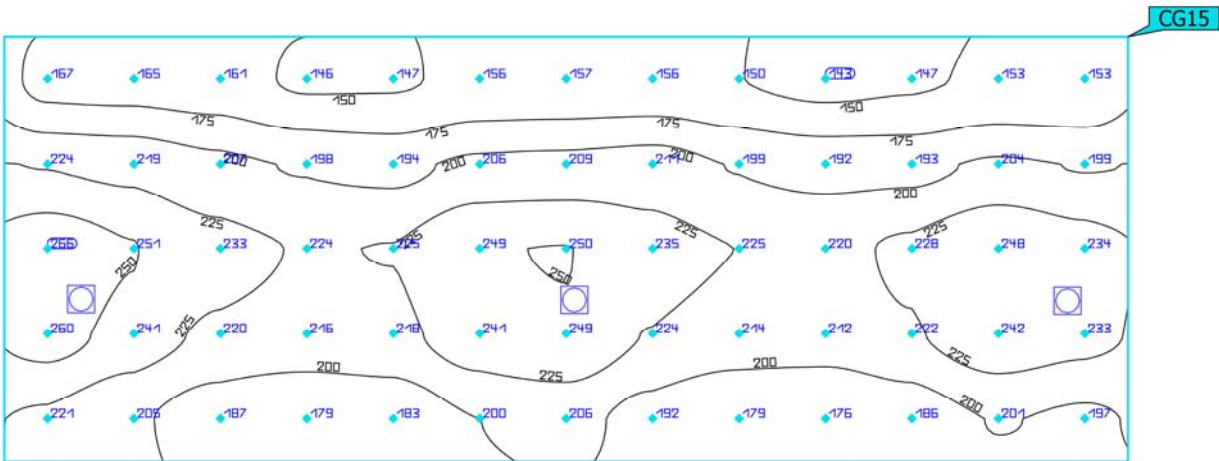

Properties	\bar{E}	E_{min}	E_{max}	$U_o (g_1)$	g_2	Index
MASTER'S ROOM WASH Perpendicular illuminance Height: 0.850 m	204 lx	143 lx	266 lx	0.70	0.54	CG15

Utilisation profile: DIALux presetting (34.2 Standard (office))



Building 1 (Light scene 1)
Elevator lobby

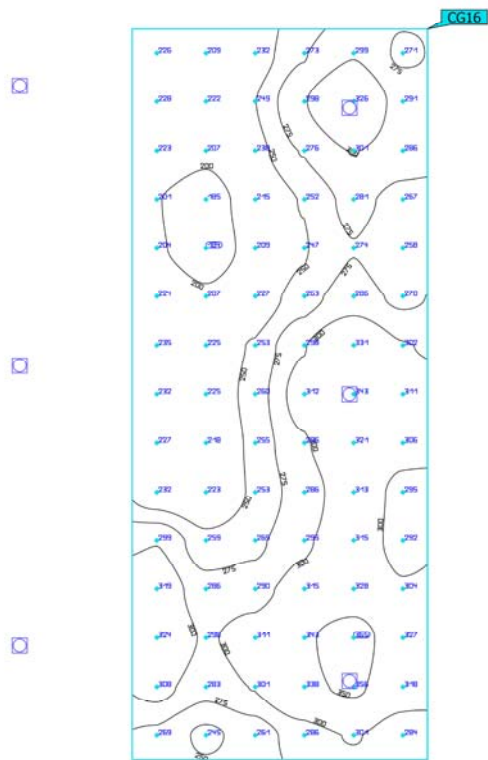

Properties	\bar{E}	E_{min}	E_{max}	$U_o (g_1)$	g_2	Index
Elevator lobby Perpendicular illuminance Height: 0.850 m	273 lx	184 lx	365 lx	0.67	0.50	CG16

Utilisation profile: DIALux presetting (34.2 Standard (office))

Building 1 (Light scene 1)
Study room

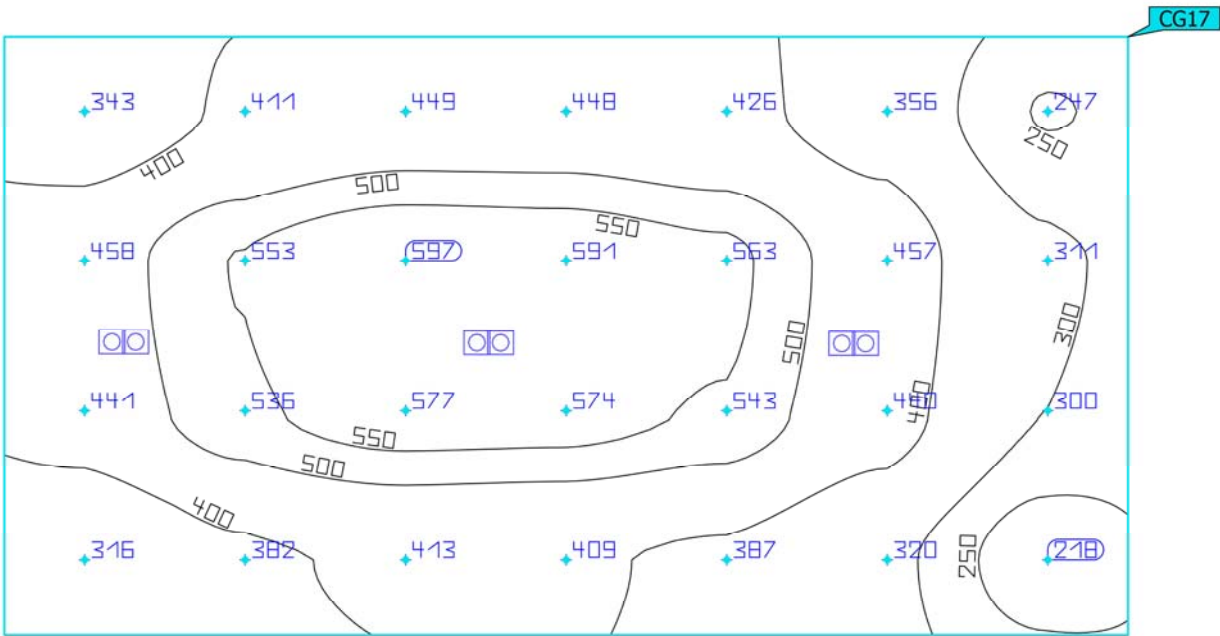



Properties	\bar{E}	E_{min}	E_{max}	$U_o (g_1)$	g_2	Index
Study room Perpendicular illuminance Height: 0.850 m	431 lx	218 lx	597 lx	0.51	0.37	CG17

Utilisation profile: DIALux presetting (34.2 Standard (office))

Building 1 (Light scene 1)

MASTER'S SUITE

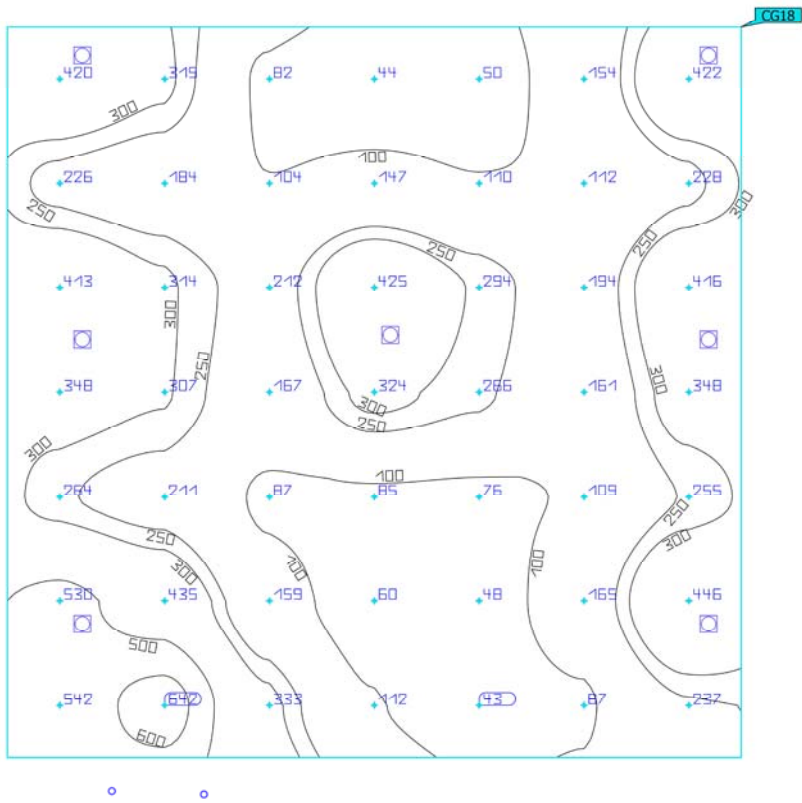



Properties	\bar{E}	E_{min}	E_{max}	$U_o (g_1)$	g_2	Index
MASTER'S SUITE Perpendicular illuminance Height: 0.850 m	239 lx	43.2 lx	642 lx	0.18	0.067	CG18

Utilisation profile: DIALux presetting (34.2 Standard (office))

Building 1 (Light scene 1)


MULTIPURPOSE ROOM

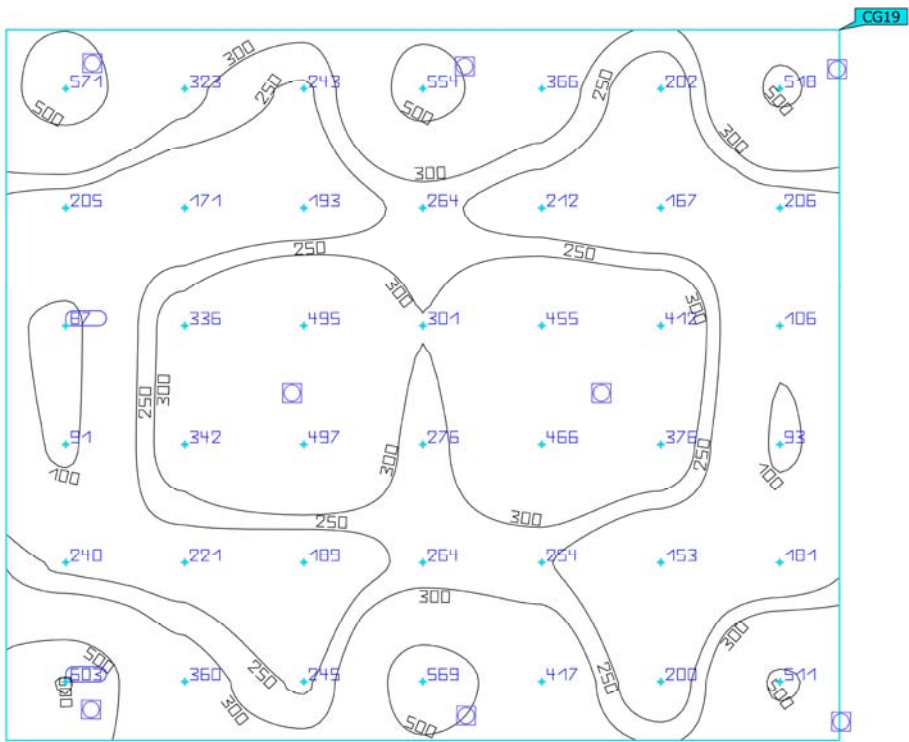

Properties	\bar{E}	E_{min}	E_{max}	$U_o (g_1)$	g_2	Index
MULTIPURPOSE ROOM Perpendicular illuminance Height: 0.850 m	308 lx	86.6 lx	603 lx	0.28	0.14	CG19

Utilisation profile: DIALux presetting (34.2 Standard (office))

Building 1 (Light scene 1)


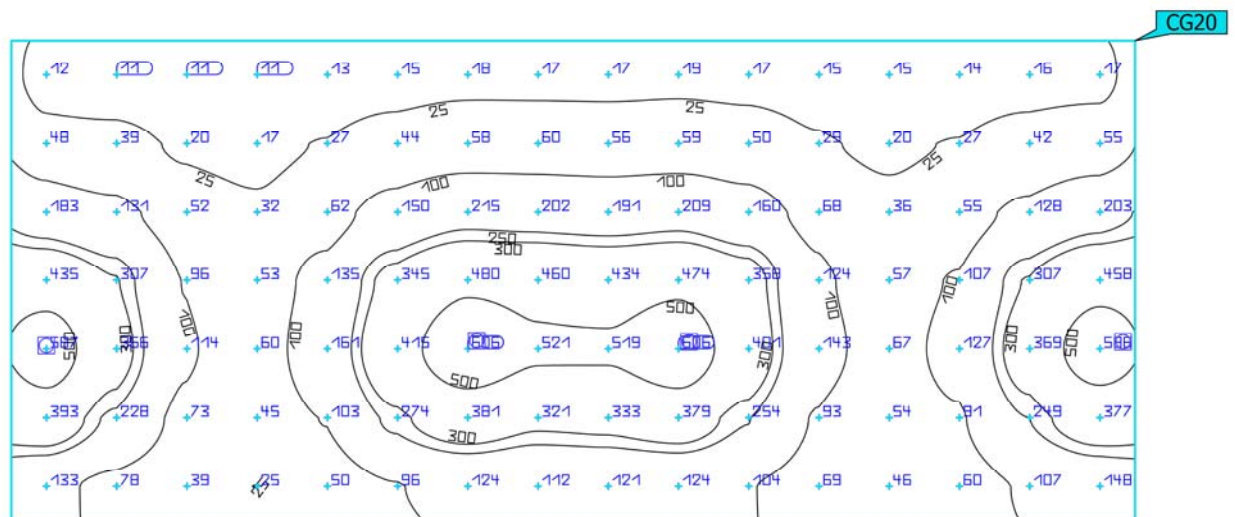
SUNROOM

Properties	\bar{E}	E_{min}	E_{max}	$U_o (g_1)$	g_2	Index
SUNROOM Perpendicular illuminance Height: 0.850 m	164 lx	10.7 lx	606 lx	0.065	0.018	CG20

Utilisation profile: DIALux presetting (34.2 Standard (office))

Building 1 (Light scene 1)

MASTER'S BATHROOM 1

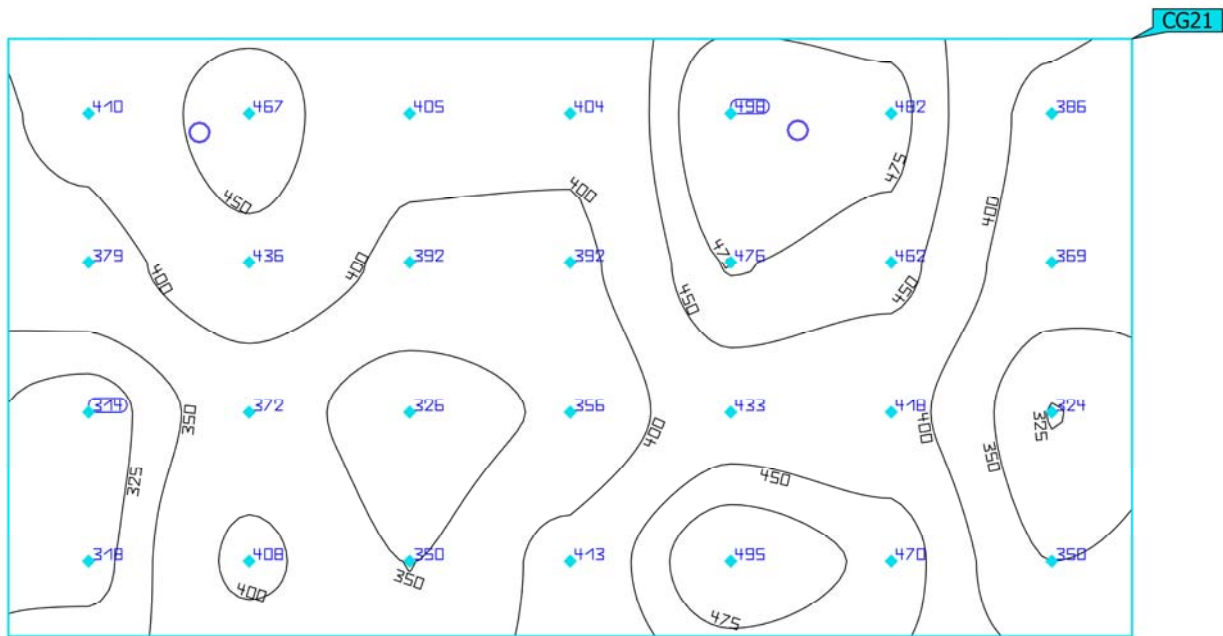



Properties	\bar{E}	E_{min}	E_{max}	$U_o (g_1)$	g_2	Index
MASTER'S BATHROOM 1 Perpendicular illuminance Height: 0.850 m	404 lx	314 lx	498 lx	0.78	0.63	CG21

Utilisation profile: DIALux presetting (34.2 Standard (office))

Building 1 (Light scene 1)

PANTRY

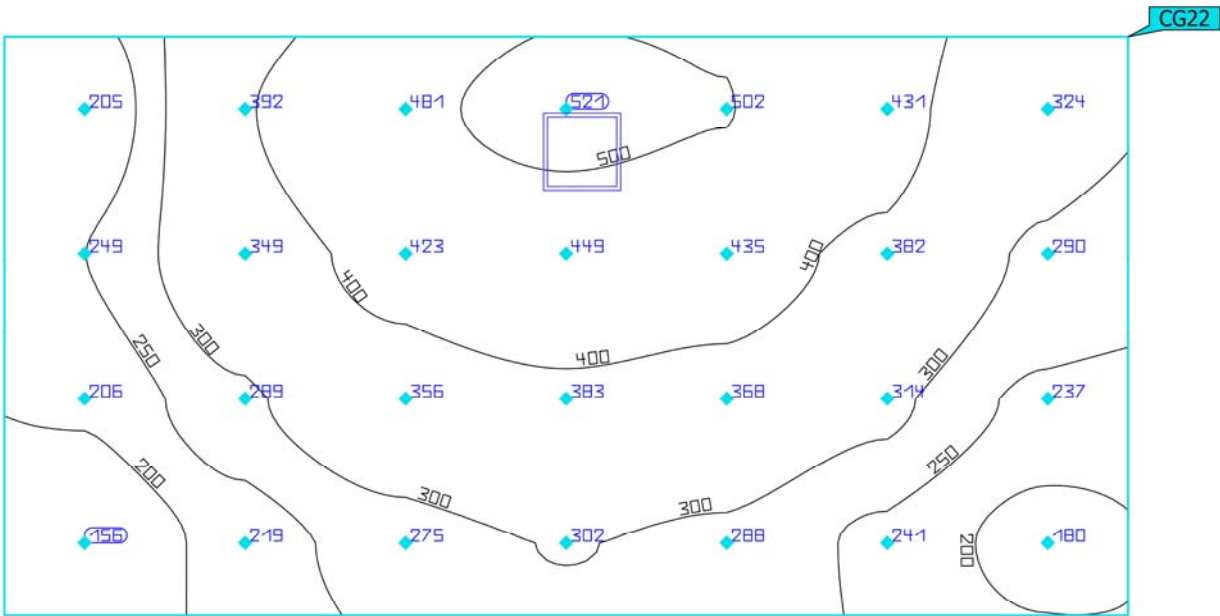

Properties	\bar{E}	E_{min}	E_{max}	$U_o (g_1)$	g_2	Index
PANTRY Perpendicular illuminance Height: 0.850 m	330 lx	156 lx	521 lx	0.47	0.30	CG22

Utilisation profile: DIALux presetting (34.2 Standard (office))